
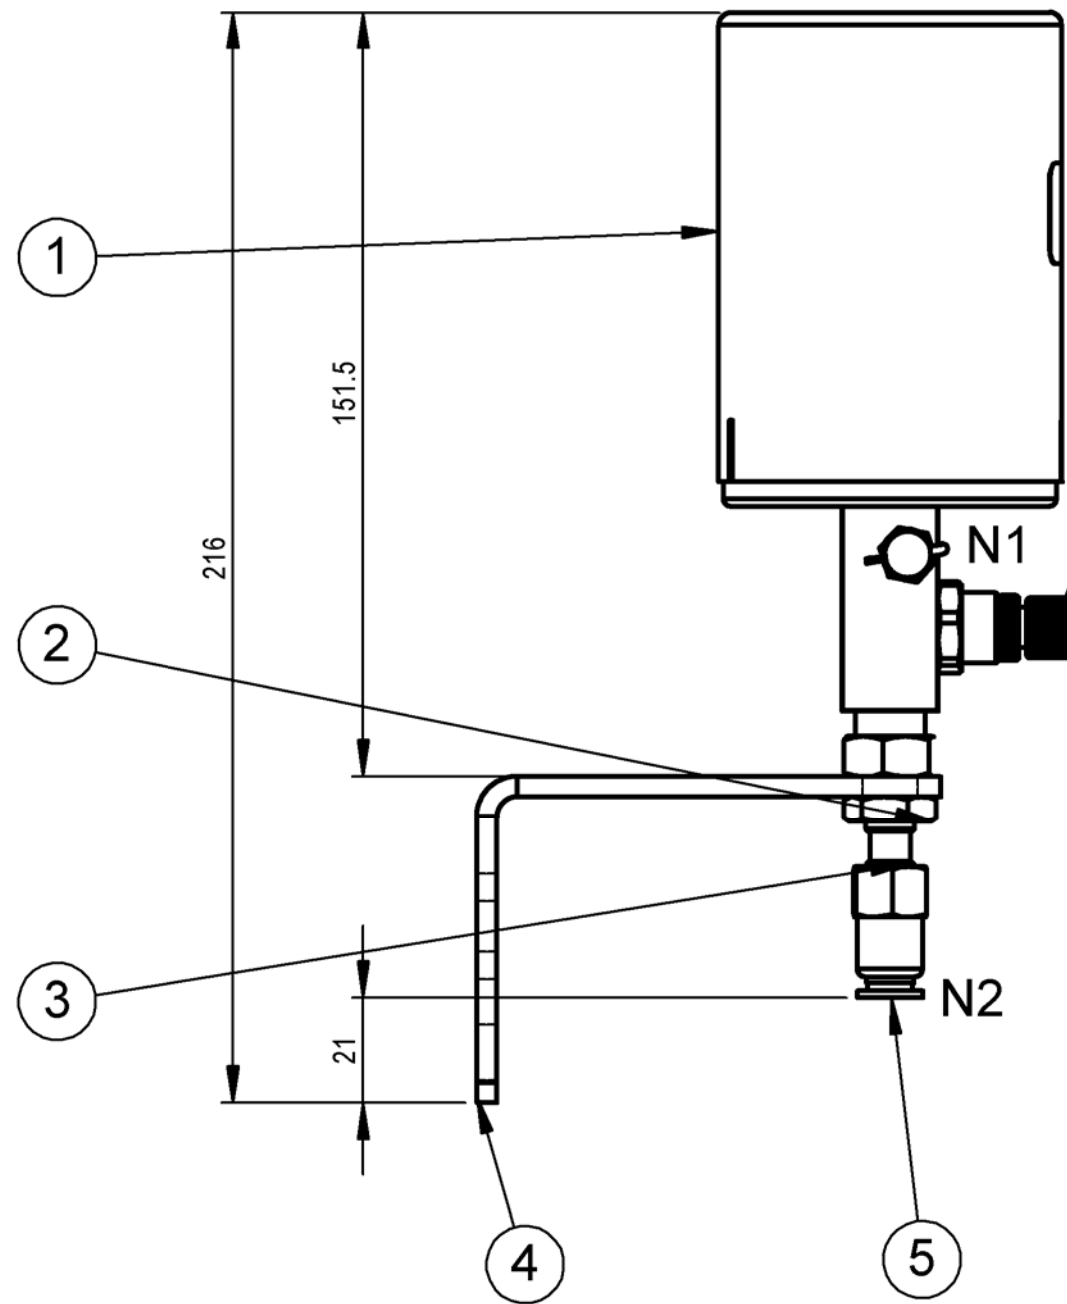





This drawing is the property of FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO.,LTD.unauthorized disclosure to any third party or duplication is not permitted.

序号 NO.	名称 Name	材质 Material	数量 Quantity	备件 Spare Part	备注 Remark
1	注脂器/Grease injector	/	1		
2	六角薄螺母/Nut	S30408	1		
3	穿板对丝接头/Nipple	S30408	1		
4	支架/Bracket	S30408	1		
5	软管接头/Hose coupling	S30408	1		

设计条件 DESIGN CONDITIONS		
设计规范 Design Code	/	
		壳程 SHELL
设计压力 Design pressure	(MPaG)	0.5
设计温度 Design TEMP.	(℃)	60
最大许用工作压力 MAWP	(MPaG)	0.5
最低设计金属温度 MDMT	(MPaG)	-10
主体材质 Main material	Aluminum alloy + Plastic	
容积 Volume	ml	150
使用油脂粘度 Using grease viscosity		Lubricating oil or lubricating grease (MAX NLGI 2#)
管 口 表 LIST OF NOZZLE		
符号 ITEM	连接标准及尺寸 CON.STD. & SIZE	用途或名称 SERVICE
N1	/	注脂口 Inlet
N2	φ8 hose	润滑油出口 Outlet
操作使用 Operation And Use		
1、拆下油嘴盖，检查有无堵塞。 Remove the oil cap and check for any blockages.		
2、加注0#或1#油脂请打开旋钮至少一圈，2#油脂请打开2圈。 To add 0# or 1# lubricating oil, please turn the knob at least one full circle. For 2# lubricating oil, please turn it for two full rotations.		
3、确保油脂注入设备，然后旋钮做微量微调。 Make sure to inject the grease into the equipment, and then make a slight adjustment with the knob.		
油脂粘度/Viscosity of oil	旋钮打开一圈吐出量/Output volume in each rotation (g/h)	
0#	0.15g	
1#	0.10g	
2#	0.05g	
* 适用于单点注油，远距离安装最大不超过0.5m。 Suitable for single-point oil injection, with the maximum installation distance not exceeding 0.5 meters.		

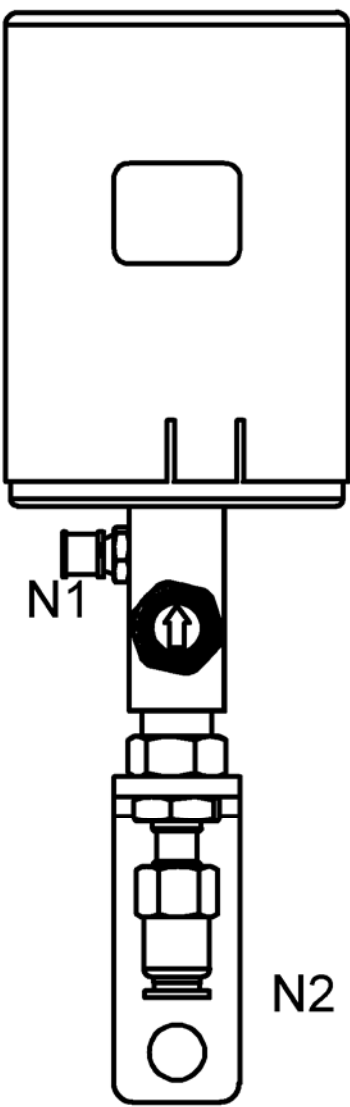

调节旋钮
Adjusting knob

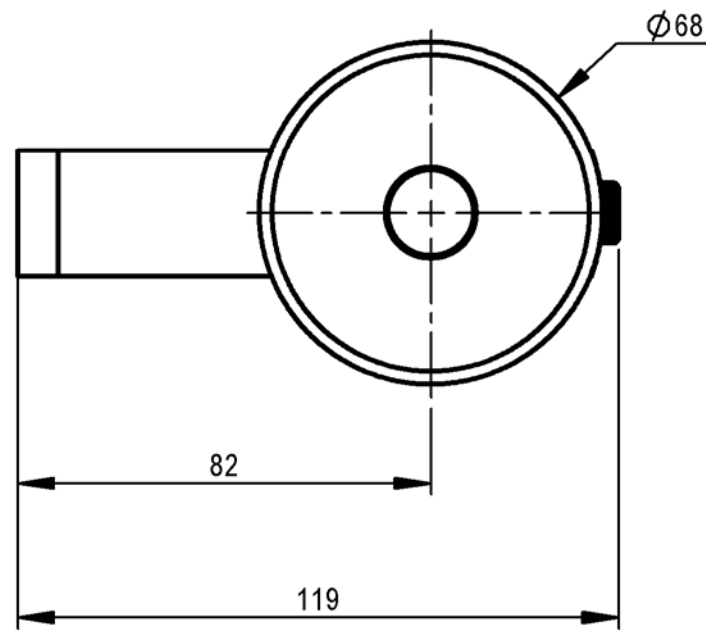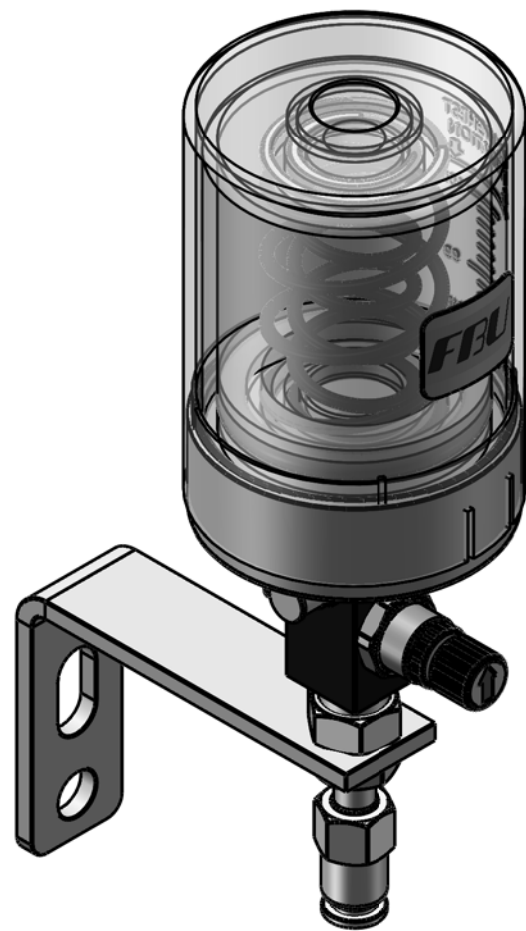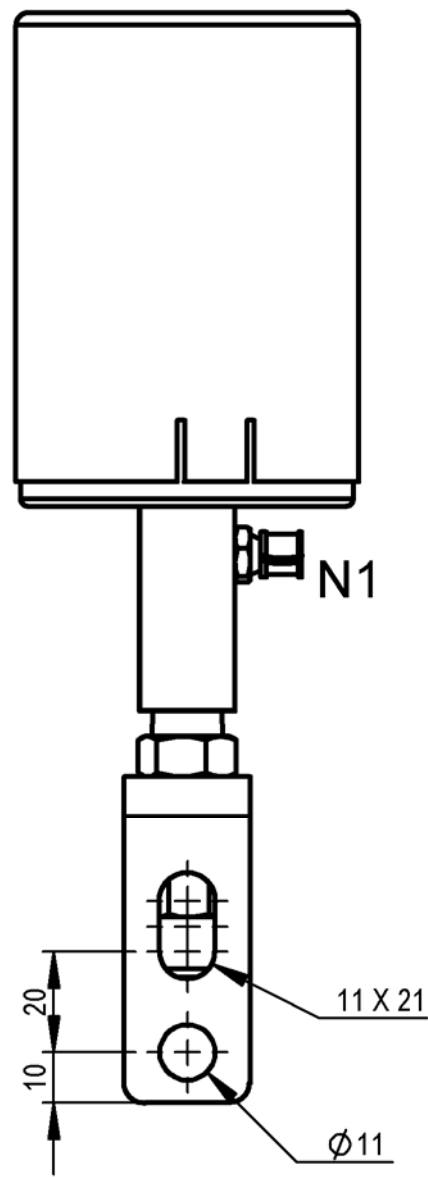

备注 Remarks								
未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000
公差 Tolerances			±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
Format/图幅 DIN EN ISO 216		A2	第一视角 Projection Method 1	表面粗糙度表示方法符合 Method of indicating surface to ISO1302			公差符合 Tolerances according to	ISO 2768-m
修 订								
标记 Item	描述 Description	日期 Date	 昆山福步工业设备有限公司 FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO., LTD.					
			姓名 Name	日期 Date	名称 / Name			
			设计 Design	自动注塑系统				
			校核 Checked	规格型号 / TYPE NO.				
			审核 Approved	AOC150N				
来源图号 Source	材质 Material			物料编码/Code			重量/Weight 348.75	
比例 Scale 1:1.5	组 合 件			示意图			版本/ Rev.	