
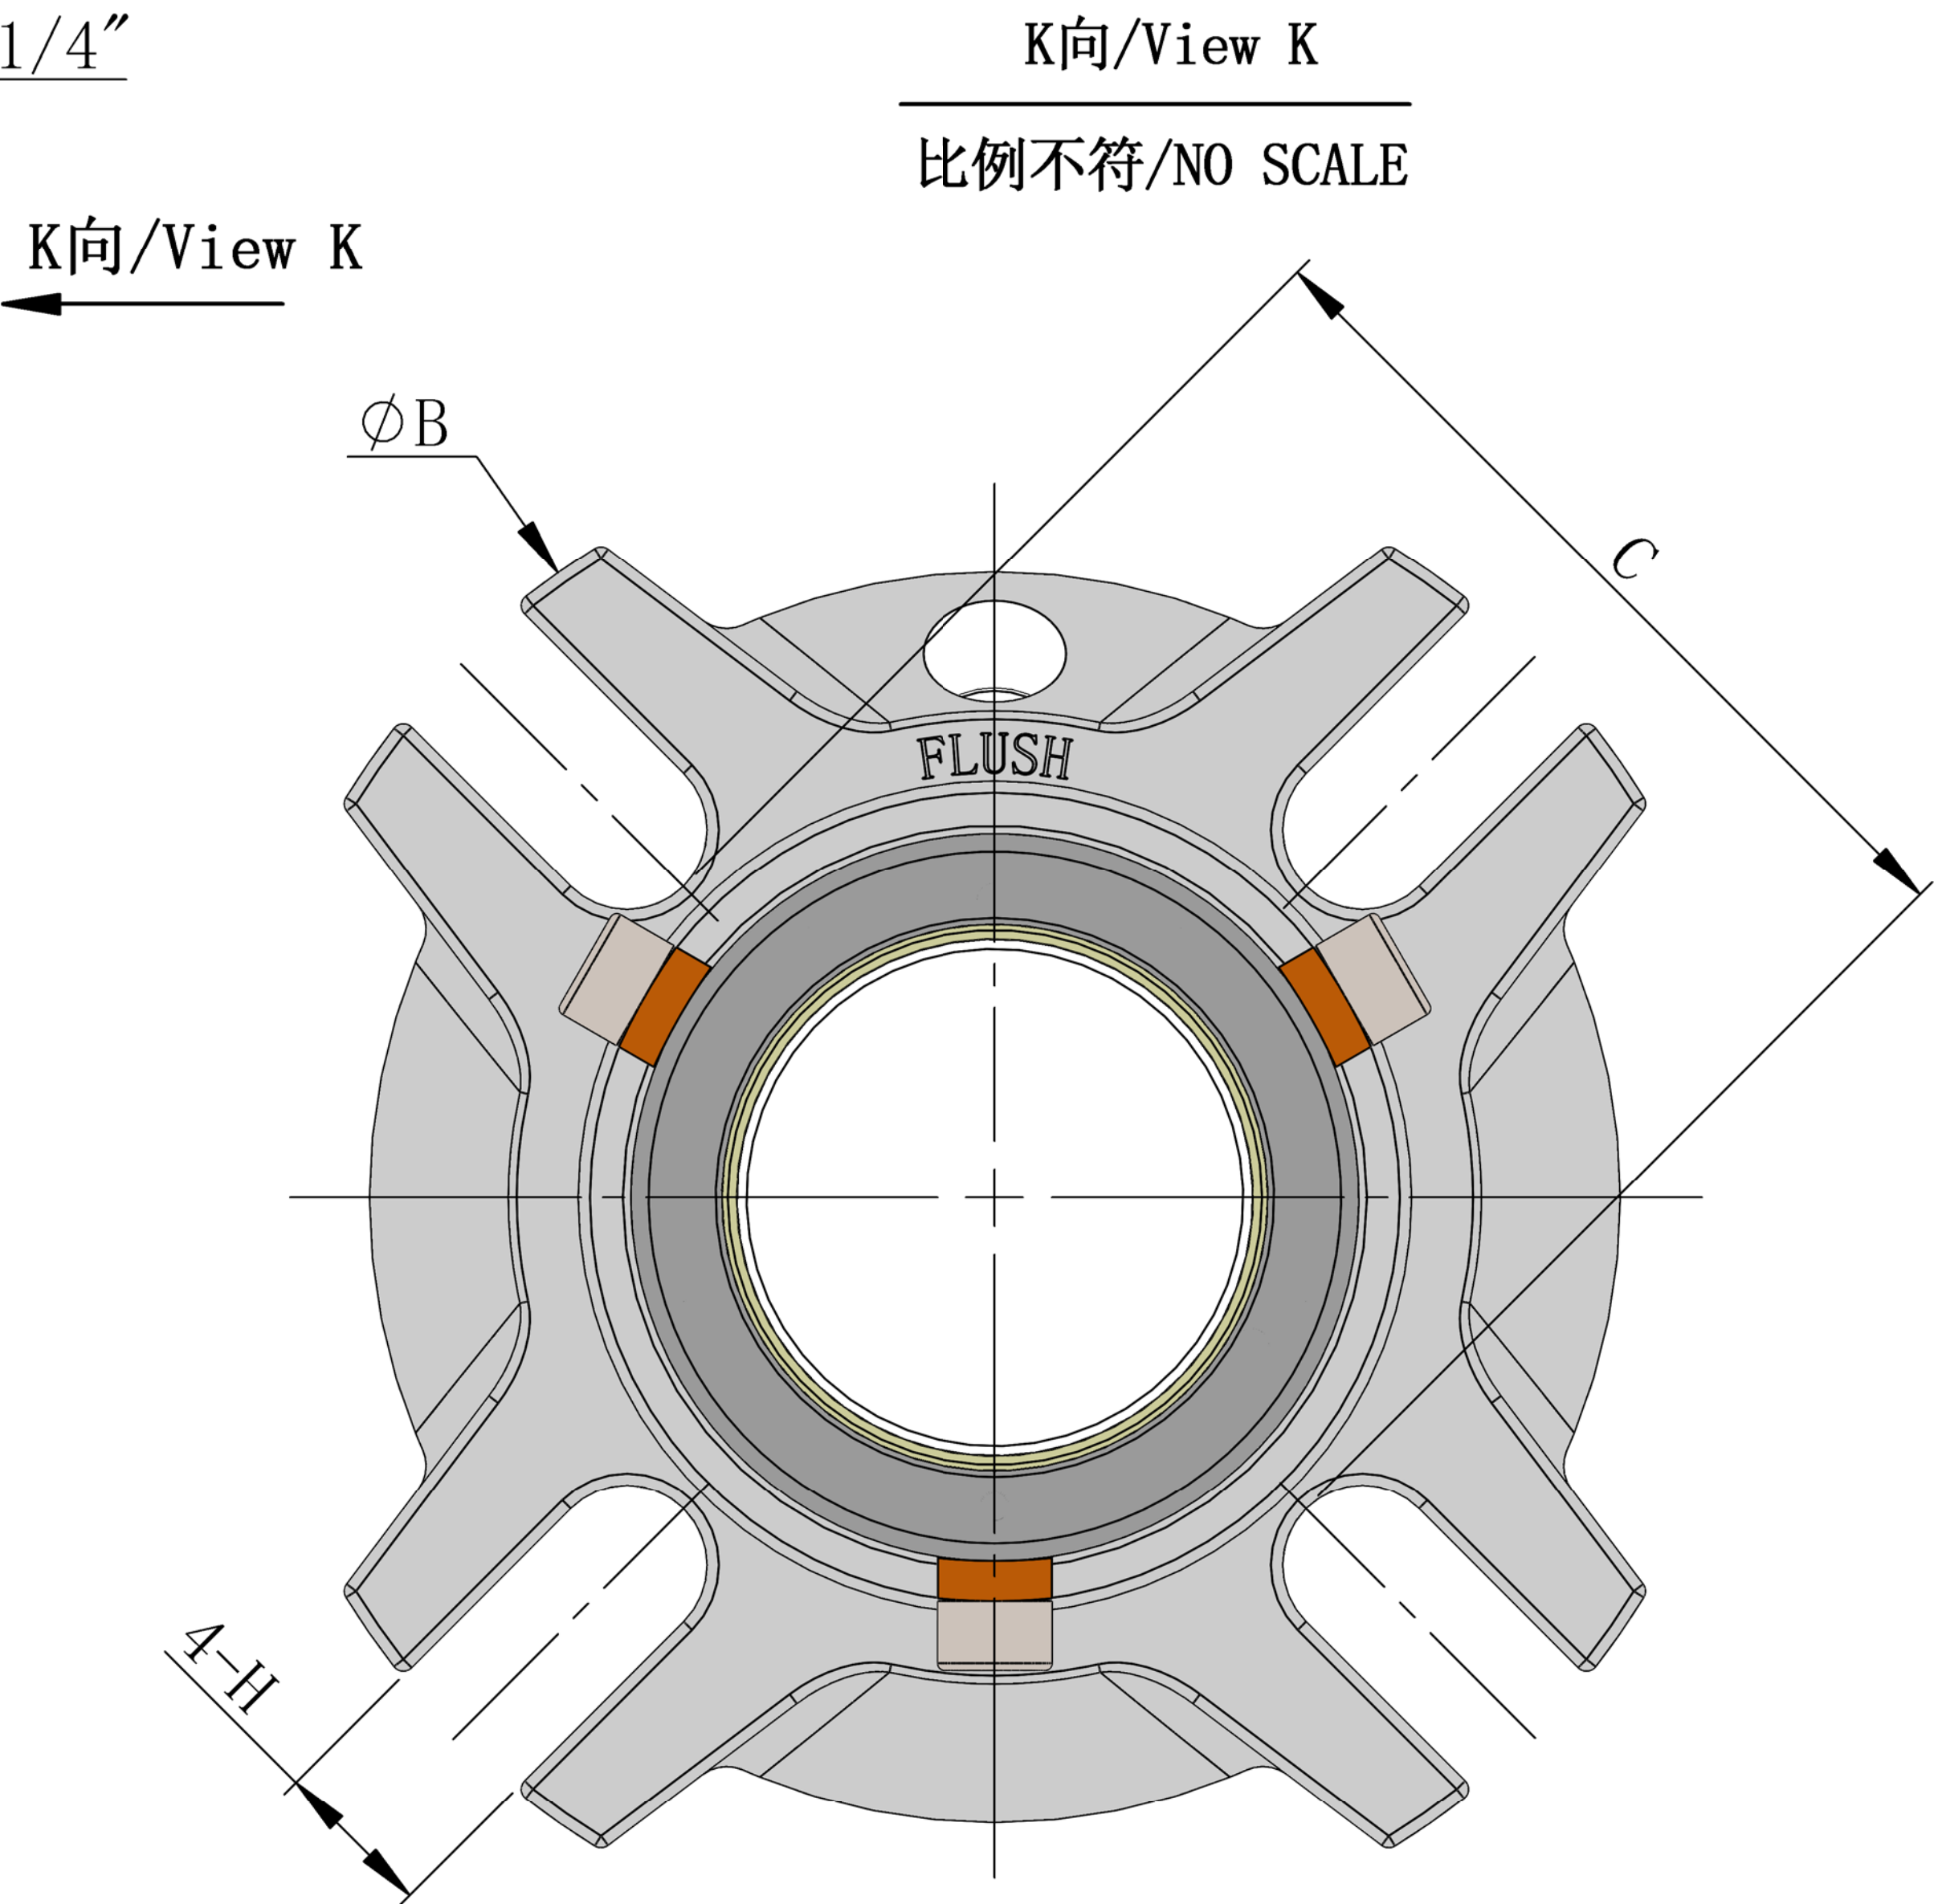


本图纸为昆山福步工业设备有限公司财产，未经本单位许可不得复制或转给第三者。
This drawing is the property of FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO.,LTD.unauthorized disclosure to any third party or duplication is not permitted.


接口说明 Connection	
F	冲洗液接口

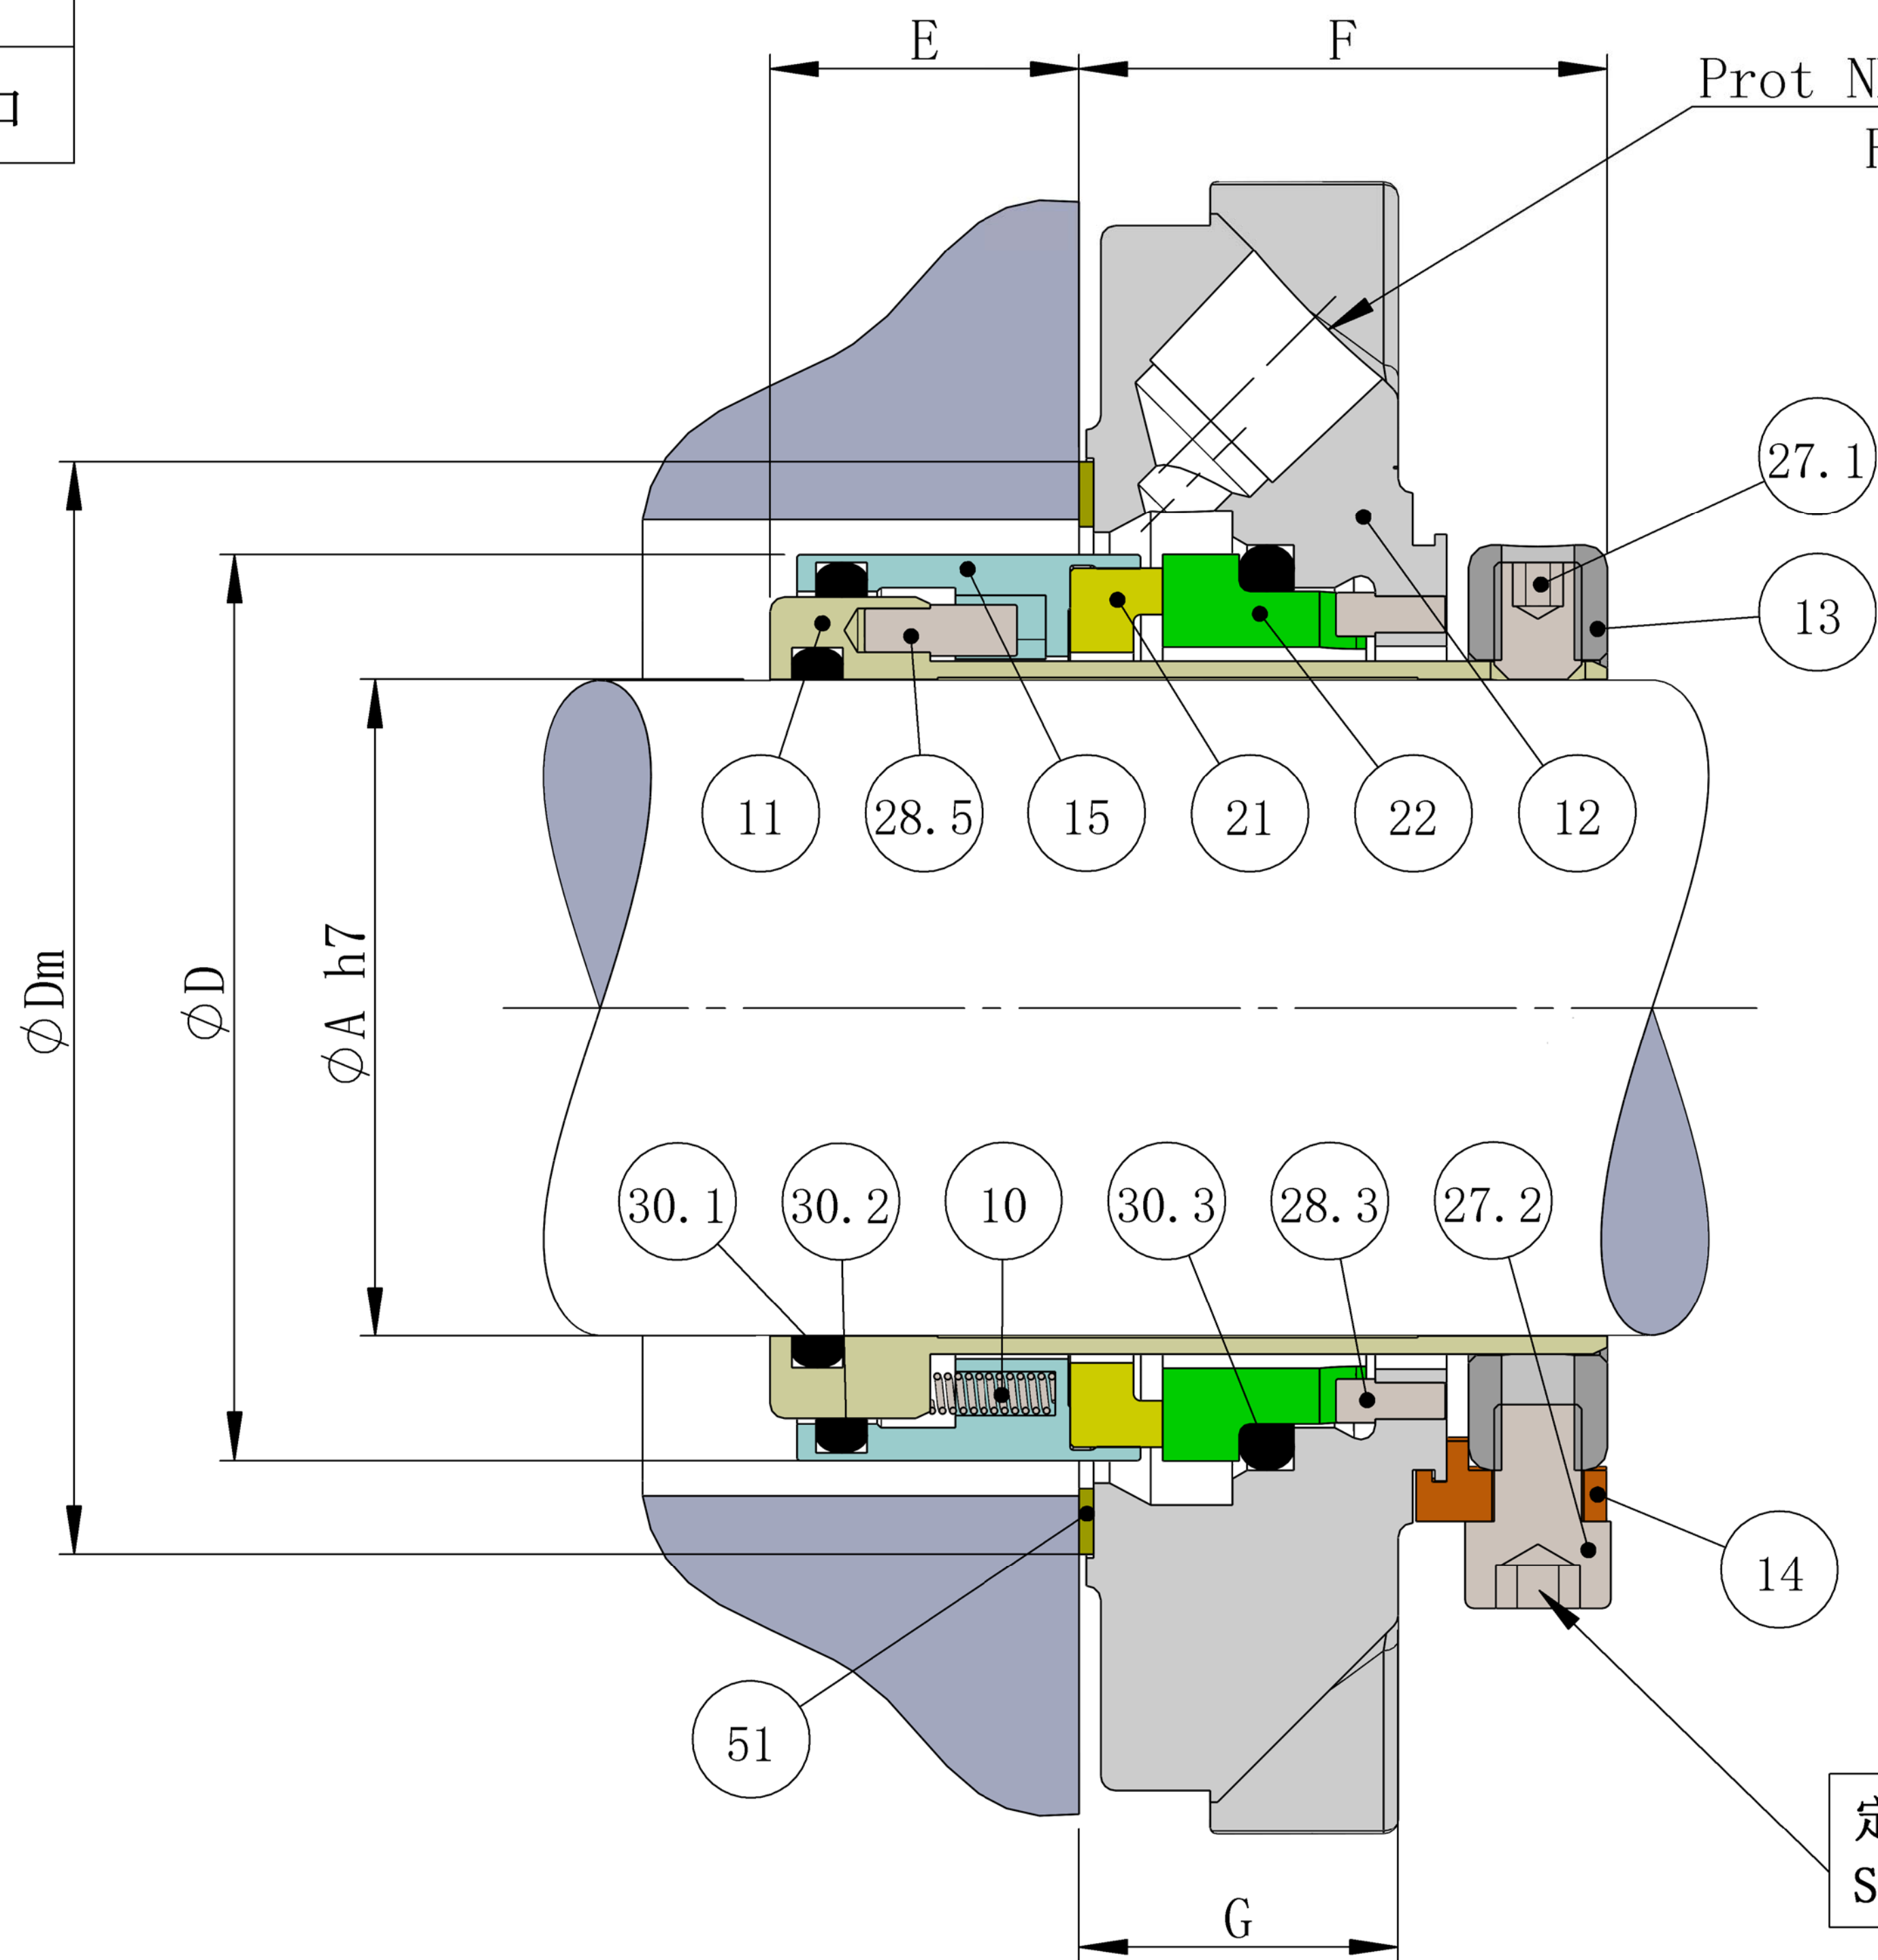


序号 No	零件名称 Description	材料 Material
11	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
15	动环座/Rotating Seat	316SS不锈钢/Stainless Steel
21	动环/Rotary Face	Carbon/SSIC/TC
22	静环/Stationary Face	SSIC/TC
12	压盖/Gland	316SS不锈钢/Stainless Steel
13	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
30.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.3	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
51	垫片/Gasket	非石棉/AF1
10	弹簧/Spring	Alloy 276
27.1	驱动螺钉/Drive Screw	316SS不锈钢/Stainless Steel
14	定位块/Setting Clip	铜/Brass
27.2	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel

ESM-尺寸信息 (mm)								
A	B	C	D	Dm	E	F	G	H
24	104.7	60.3	37.97	56	18.46	37.16	22.8	13.2
25	104.7	60.3	39.37	56	17.46	38.14	23.8	13.2
28	104.7	60.3	42.55	58	17.46	38.14	23.8	13.2
30	110	63.5	43.97	61.5	17.46	37.14	23.8	13.2
32	110	63.5	45.97	61.5	17.46	38.16	23.8	13.2
33	110	63.5	46.96	61.5	17.46	38.16	23.8	13.2
35	110	66.7	48.97	65	17.46	38.14	23.8	13.2
38	127	72	55.83	70	21.34	36.17	21.9	14.2
40	127	72	55.83	70	21.34	36.18	21.9	14.2
43	127	72	59	71	21.34	36.18	21.9	14
45	133	76.8	62.18	75	21.25	36.25	21.9	14
48	133	76.8	63.35	78	21.26	36.26	21.9	14
50	133	76.8	65.35	78	21.26	36.26	21.9	14
53	139	86	68.53	83	23.36	36.27	21.9	14
55	146.1	93.6	71.7	92	23.36	36.26	21.9	17.5
58	146.1	93.6	74.88	92	23.36	36.26	21.9	17.5
60	152	100	78.05	97	23.36	36.26	21.9	17.5
63	178	109.5	84.13	108	22.46	38.56	24.2	17.5
65	178	109.5	87.3	108	22.46	38.56	24.2	17.5
70	178	109.5	90.48	108	22.46	38.56	24.2	17.5
75	192	125.5	96.83	125	22.46	38.55	24.2	17.5
80	192	125.5	100	125	22.46	38.56	24.2	17.5
85	203	135	106.35	130	22.46	38.56	24.2	21
90	216	145	112.7	139	23.2	37.82	24.46	20
95	216	150	115.87	146	23.2	37.82	24.46	20
100	228	168	122.22	162	23.7	37.32	23.96	21

ESM-尺寸信息 (Inches)								
A	B	C	D	Dm	E	F	G	H
1.000	4.122	2.374	1.550	2.205	0.687	1.502	0.937	0.520
1.125	4.122	2.374	1.675	2.283	0.687	1.502	0.937	0.520
1.250	4.331	2.461	1.810	2.421	0.687	1.502	0.937	0.520
1.375	4.331	2.626	1.928	2.559	0.687	1.502	0.937	0.520
1.500	5.000	2.835	2.198	2.756	0.840	1.424	0.862	0.551
1.625	5.000	2.835	2.323	2.795	0.840	1.424	0.862	0.551
1.750	5.236	3.024	2.448	2.953	0.837	1.428	0.862	0.551
1.875	5.236	3.024	2.573	3.071	0.837	1.428	0.862	0.551
2.000	5.472	3.386	2.698	3.268	0.920	1.426	0.862	0.551
2.125	5.752	3.685	2.823	3.622	0.920	1.428	0.862	0.689
2.250	5.752	3.685	2.948	3.622	0.920	1.428	0.862	0.689
2.375	5.984	3.937	3.073	3.819	0.920	1.428	0.862	0.689
2.500	7.008	4.311	3.312	4.252	0.884	1.518	0.953	0.689
2.625	7.008	4.311	3.437	4.252	0.884	1.518	0.953	0.689
2.750	7.008	4.311	3.562	4.252	0.884	1.518	0.953	0.689
2.875	7.559	4.941	3.687	4.921	0.886	1.518	0.953	0.689
3.000	7.559	4.941	3.812	4.921	0.884	1.518	0.953	0.689
3.125	7.559	4.941	3.937	4.921	0.884	1.518	0.953	0.689
3.250	7.992	5.315	4.062	5.118	0.884	1.518	0.953	0.827
3.375	7.992	5.315	4.187	5.118	0.884	1.518	0.953	0.827
3.500	7.992	5.315	4.312	5.118	0.884	1.518	0.953	0.827
3.625	8.504	5.709	4.437	5.472	0.913	1.489	0.963	0.787
3.750	8.504	5.906	4.562	5.748	0.913	1.489	0.963	0.787
3.875	8.504	5.906	4.687	5.748	0.933	1.469	0.943	0.787
4.000	8.976	6.614	4.812	6.378	0.933	1.469	0.943	0.827

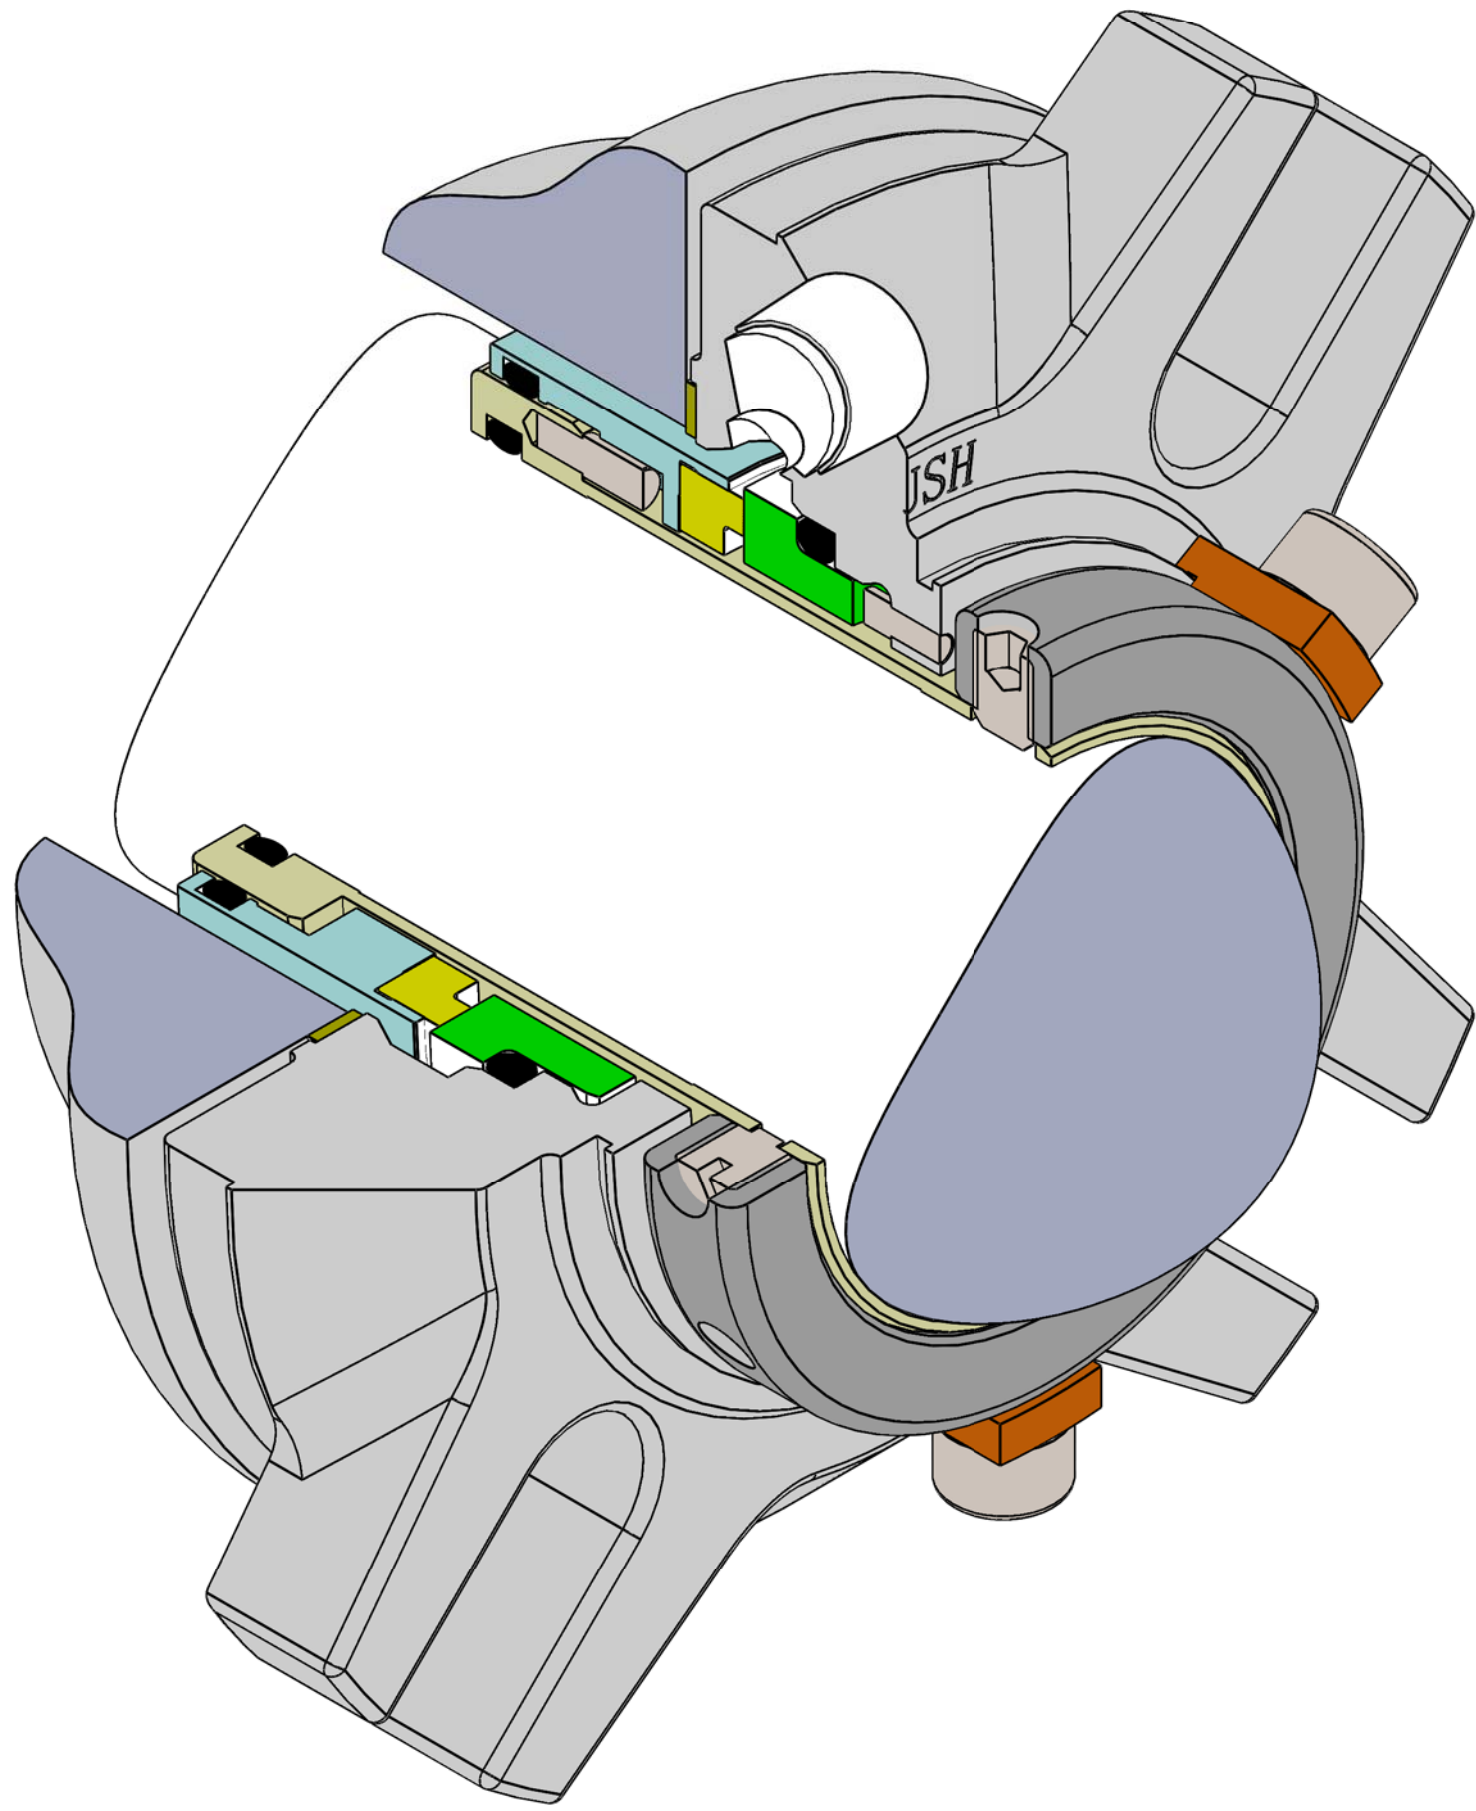

未注公差按照 General tolerance Per ISO 2768-m			名义尺寸 Nominal dimensions [mm]		0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	
			公差 Tolerances [mm]		±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	
Format/图幅 DIN EN ISO 216			A3	第一视角 Projection Method 1			表面粗糙度表示方法符合 Method of indicating surface to		ISO1302 (µm)	公差符合 Tolerances according to	ISO 2768-m
标记 NO.			处数 QTY	描述 Description	日期 Date	姓名 Name	 昆山福步工业设备有限公司 FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO., LTD.				
											
											
							规格型号/TYPE NO.				
											
											
							ESM				
							机械密封				
							图号/Drawing NO.				
							质量/Weight 1845.14 g				
							版本: Rev. A				
</											