


机械密封定制服务商

GP SEAL WATER CONTROL AND MONITORING SYSTEM GP水流量控制及监测系统

完美监测和控制密封及密封水系统

Complete monitoring and control solution
for seals and water systems

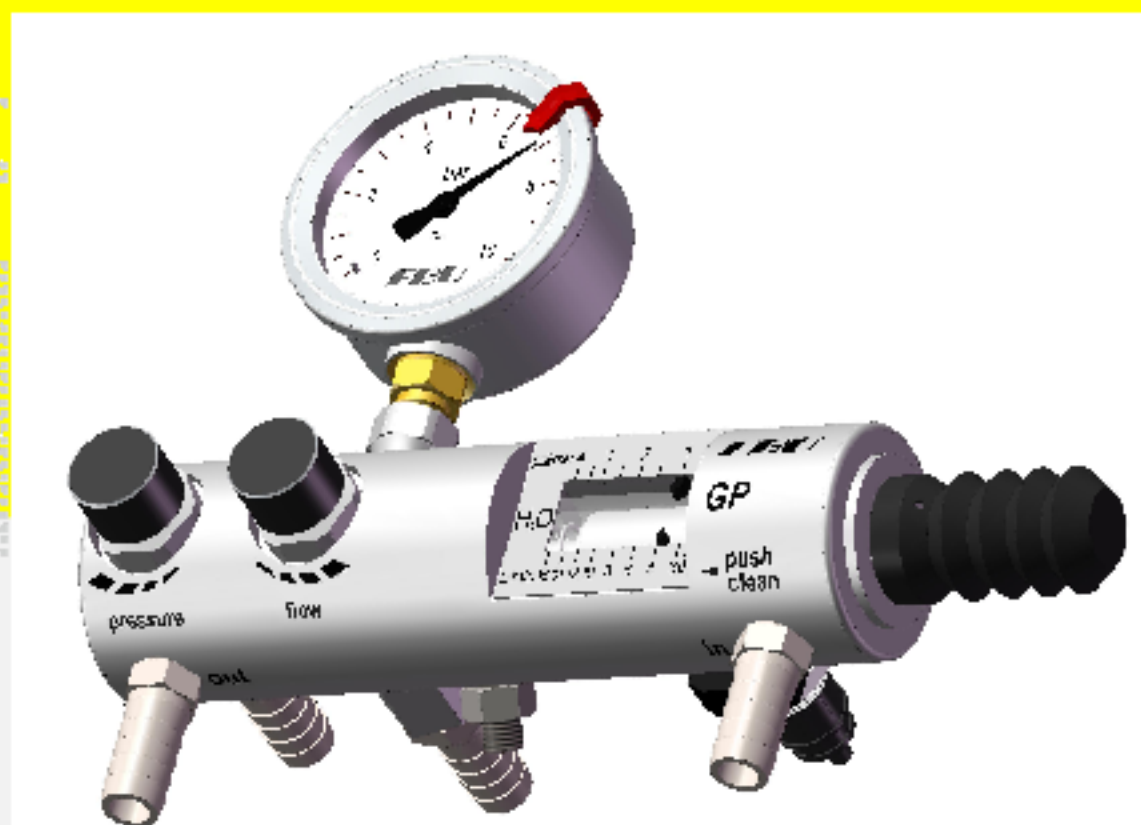

FRU

福步工业·中国

Mechanical Seals ODM Service Provider



为什么选择GP型密封水系统

Why choose GP Seal Water System

GP专为在高温、高压和化学腐蚀性元素存在的恶劣操作环境中使用而设计。这使得它非常适合在纸浆、造纸和化学工业过程中发现的极端应用，以及各种采矿和一般工业用途。

GP is designed for use in harsh operating environments where high temperature, high pressure and chemically aggressive elements are present. This makes it ideal for extreme applications found in pulp, paper and chemical industry processes, plus a wide variety of mining and general industrial uses.


易于安装的GP不仅可以控制和监测密封水流量和压力，还可以大幅降低密封用水量。这提高了密封可靠性，延长了工艺设备的正常运行时间，减少了停机时间，降低了维护成本。

The easy to install GP not only controls and monitors seal water flow and pressure, but also drastically reduces seal water consumption. This results in increased sealing reliability, longer process equipment uptime plus reduced shutdowns and lower maintenance costs.

产品特点

Key Features

- 先进的设计，以减少密封水压损失
- 卓越的耐化学腐蚀性能
- 坚固耐用的重型结构
- 成熟的调节阀设计提供可靠的密封性能
- 提高精度
- 高工作温度(高达 212°F/100°C)
- 耐压最高可达30bar
- Advanced design to reduce seal water pressure loss
- Excellent resistance to chemical attacks and corrosion
- Rugged heavy duty structure
- Proven regulating valve design providing reliable seal performance
- Improved accuracy
- High operating temperature (up to 212°F/100°C)
- Withstand pressure up to 30bar

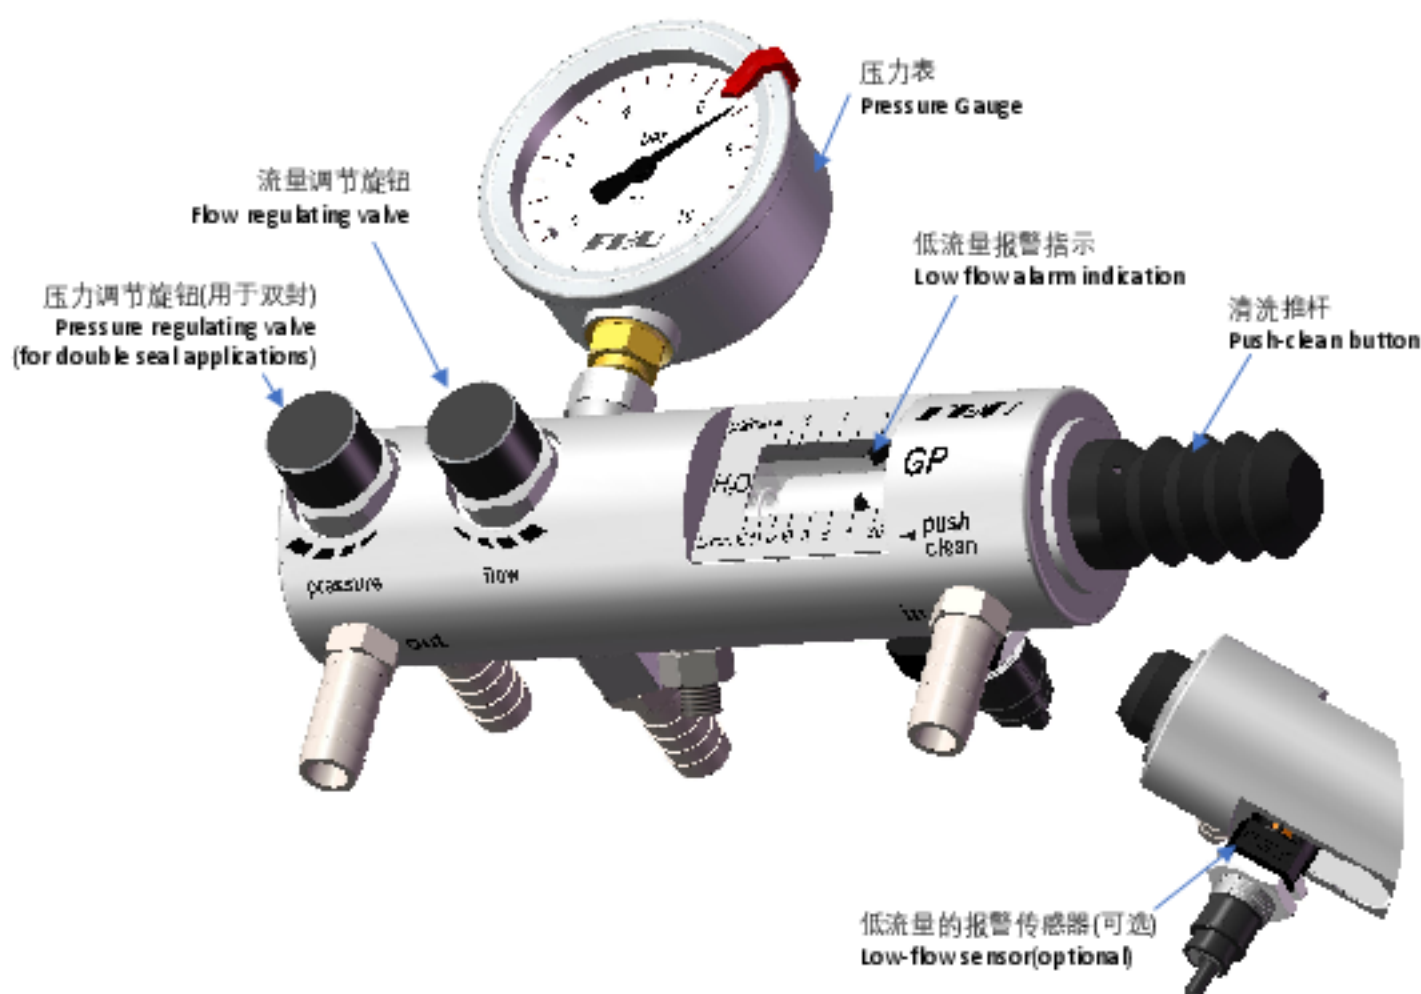

GP密封水系统订购单

Order form for GP seal water system

型式 / TYPE

- ☐ GPS型 / Type GPS
- ☐ GPD型 / Type GPD

流量量程 / Flow Rang

- ☐ 8L/min (2 GPM)
- ☐ 16L/min (4 GPM)
- ☐ 40L/min (10 GPM)

压力量程 / Pressure Range

- ☐ 10 barg/ 144 psig
- ☐ 25 barg/ 360 psig

软管套件 / Complete hose assembly

- ☐ 需要 / Yes
- ☐ 无需 / No

接头(本体) / Connections(Noumenon)

- ☐ $\Phi 13$ 软管接头 / $\Phi 13$ hose connection
- ☐ R 1/4" (无软管套件/No hose kits)
- ☐ R 3/8" (无软管套件/No hose kits)

接头(密封) / Connections(Seals)

如果需要软管套件 / if need complete hose assembly

- | | |
|---|-------------------------------|
| <input type="checkbox"/> NPT | <input type="checkbox"/> 1/8" |
| <input type="checkbox"/> R | <input type="checkbox"/> 1/4" |
| <input type="checkbox"/> 其他 / Other _____ | <input type="checkbox"/> 3/8" |
| | <input type="checkbox"/> 1/2" |

☐ 立柱 / Stand



GPS 盘根或单端面机封冲洗 Packing or Single Seal Flush

安装 / Mounting

- ☐ 支架 / Bracket



报警装置 / Alarm

- ☐ 两线直流常闭 / 2-wire DC NC
- ☐ 两线交流常闭 / 2-wire AC NC
- ☐ 两线常闭本安防爆 / 2-wire DC NC Exia
- ☐ 其他 / Other _____

GPD 双端面机封冲洗 Double Mechanical Seal

