



本图纸为昆山福步工业设备有限公司财产，未经本单位许可不得复制或转给第三者。
This drawing is the property of FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO.,LTD.unauthorized disclosure to any third party or duplication is not permitted.

接口说明 Connection	
BI	缓冲液入口
BO	缓冲液冷出口

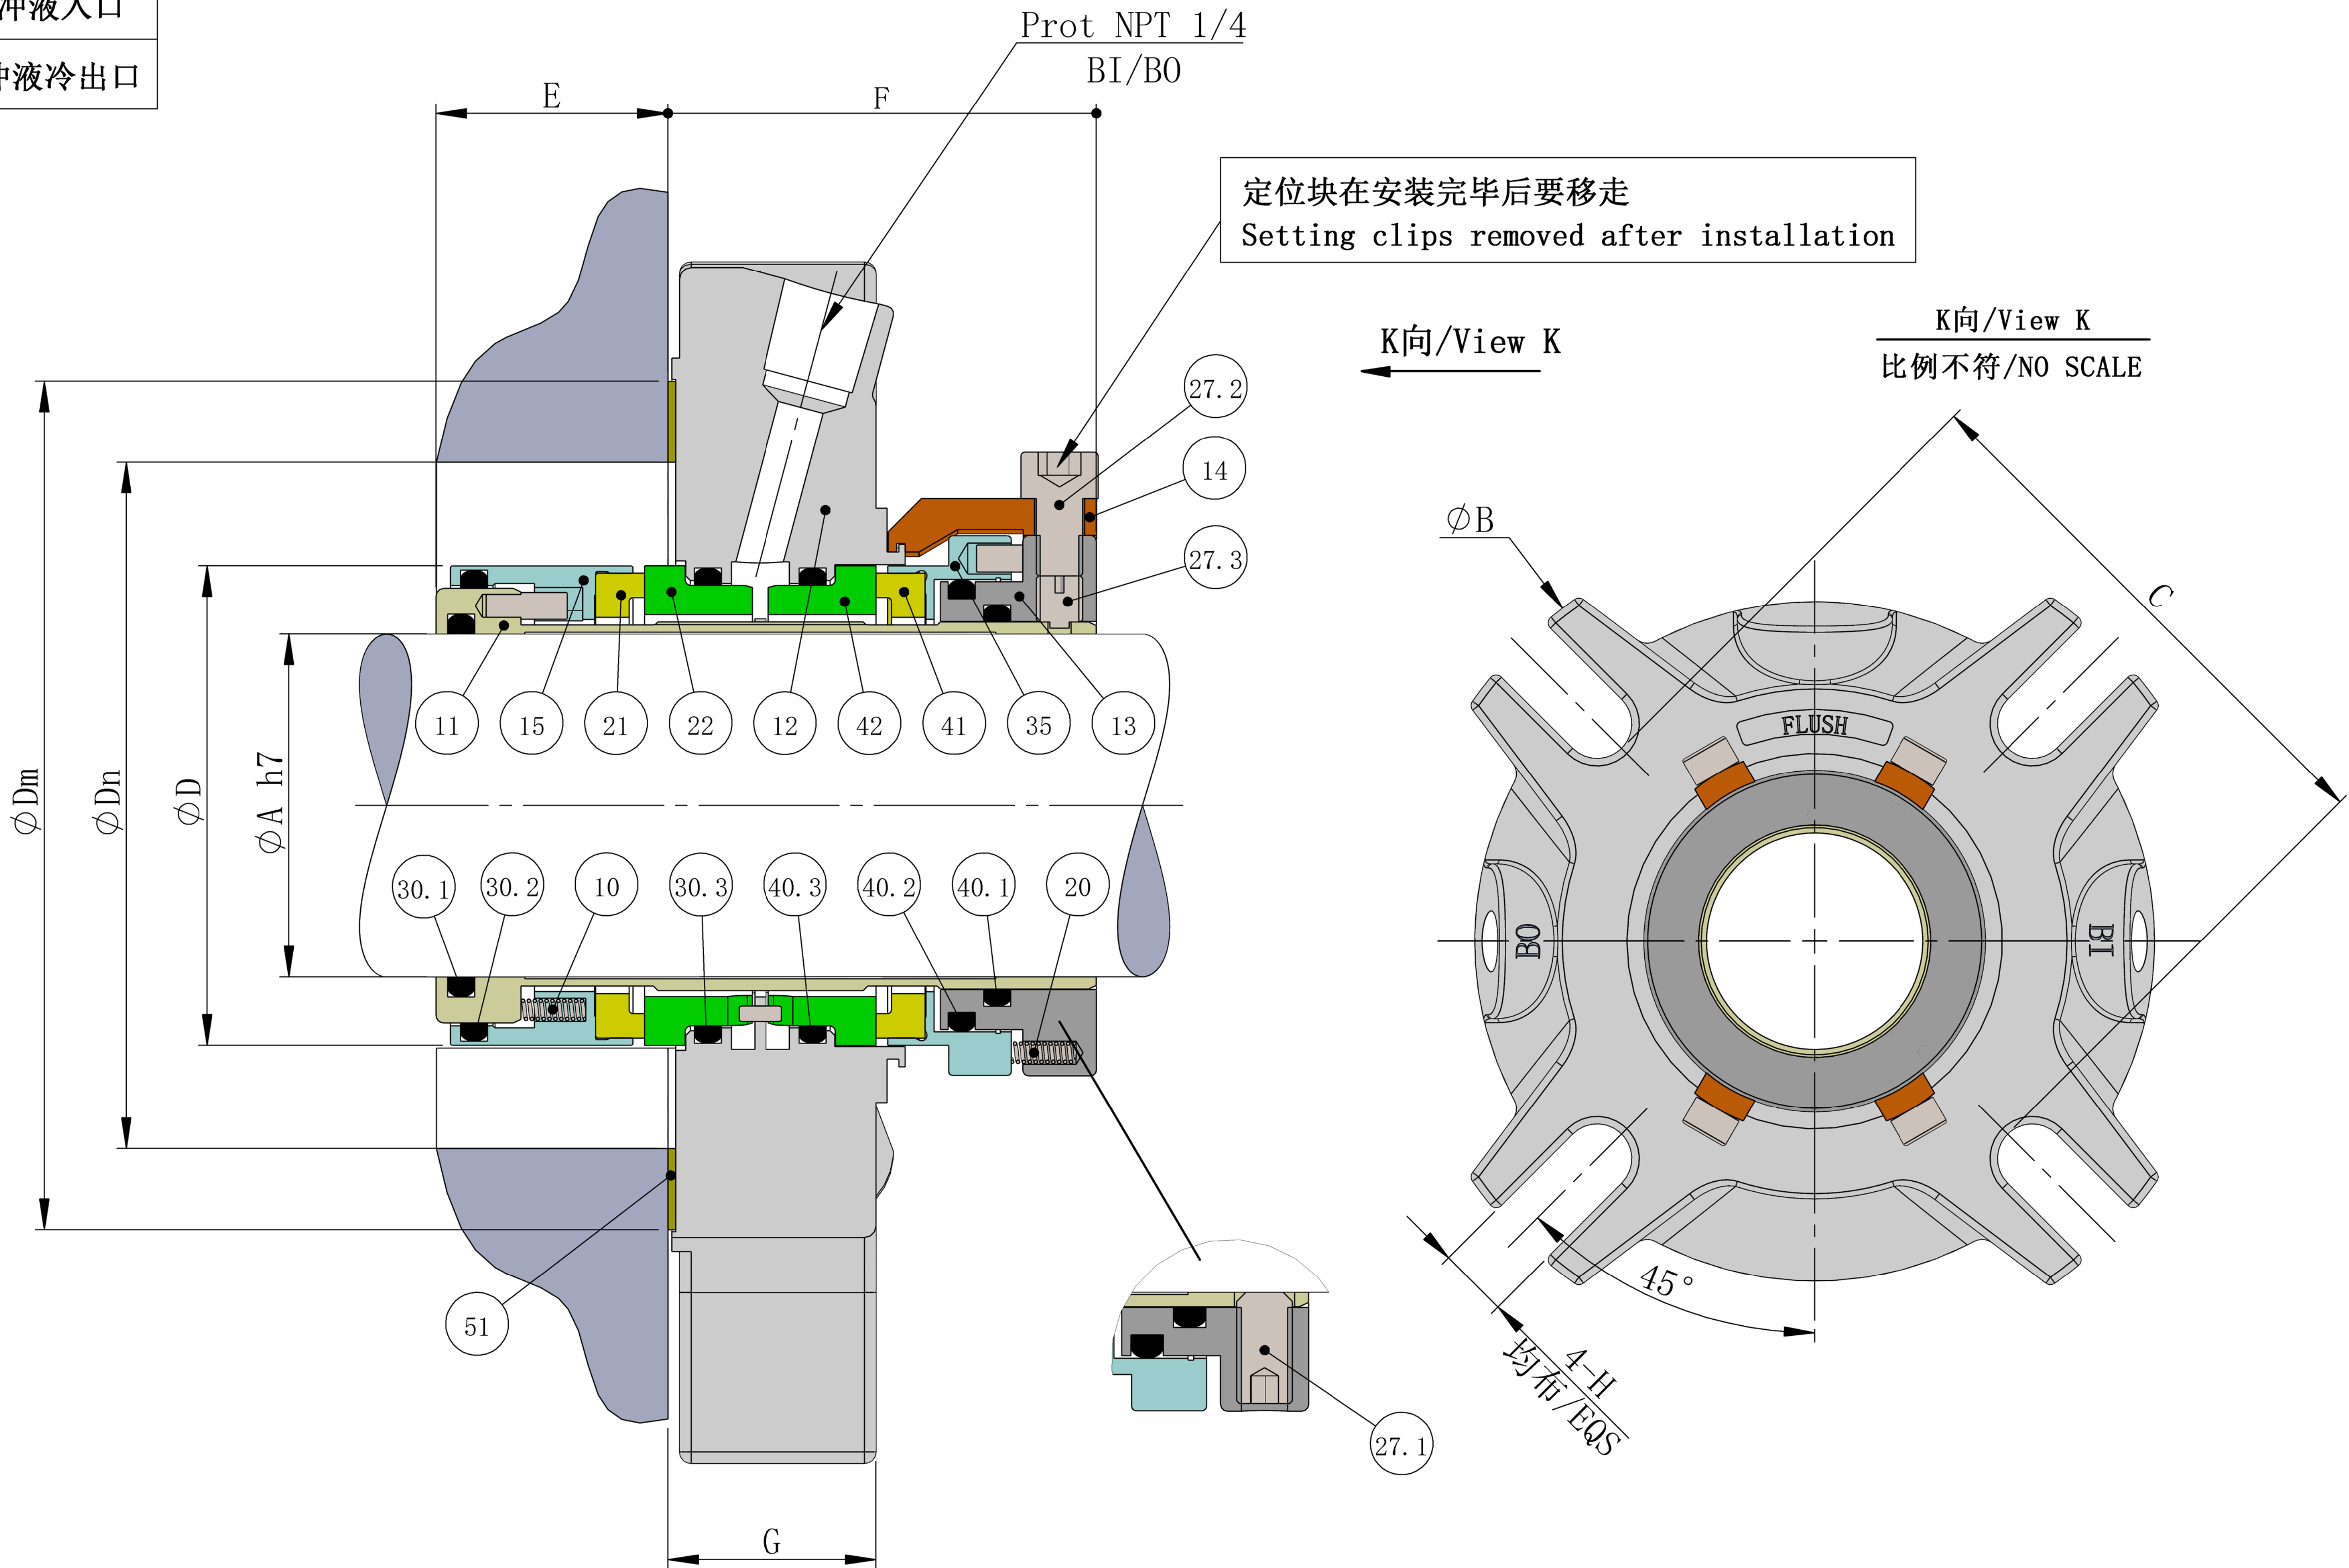


序号 No	零件名称 Description	材料 Material
11	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
15	一级动环座/Internal Rotary Seat	316SS不锈钢/Stainless Steel
21	一级动环/Internal Rotary Face	Carbon/SSIC/TC
22	一级静环/Internal Stationary Face	SSIC/TC
12	压盖/Gland	316SS不锈钢/Stainless Steel
42	二级静环/External Stationary Face	SSIC/TC
41	二级动环/External Rotary Face	Carbon/SSIC/TC
35	二级动环座/External Rotary Seat	316SS不锈钢/Stainless Steel
13	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
30.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
10	弹簧/Spring	Alloy 276
30.3	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
40.3	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
40.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
40.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
20	弹簧/Spring	Alloy 276
27.3	限位螺钉/Anti-tamper Screws	316SS不锈钢/Stainless Steel
14	定位块/Setting Clip	铜/Brass
27.2	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel
27.1	驱动螺钉/Drive Screw	316SS不锈钢/Stainless Steel
51	垫片/Gasket	PTFE

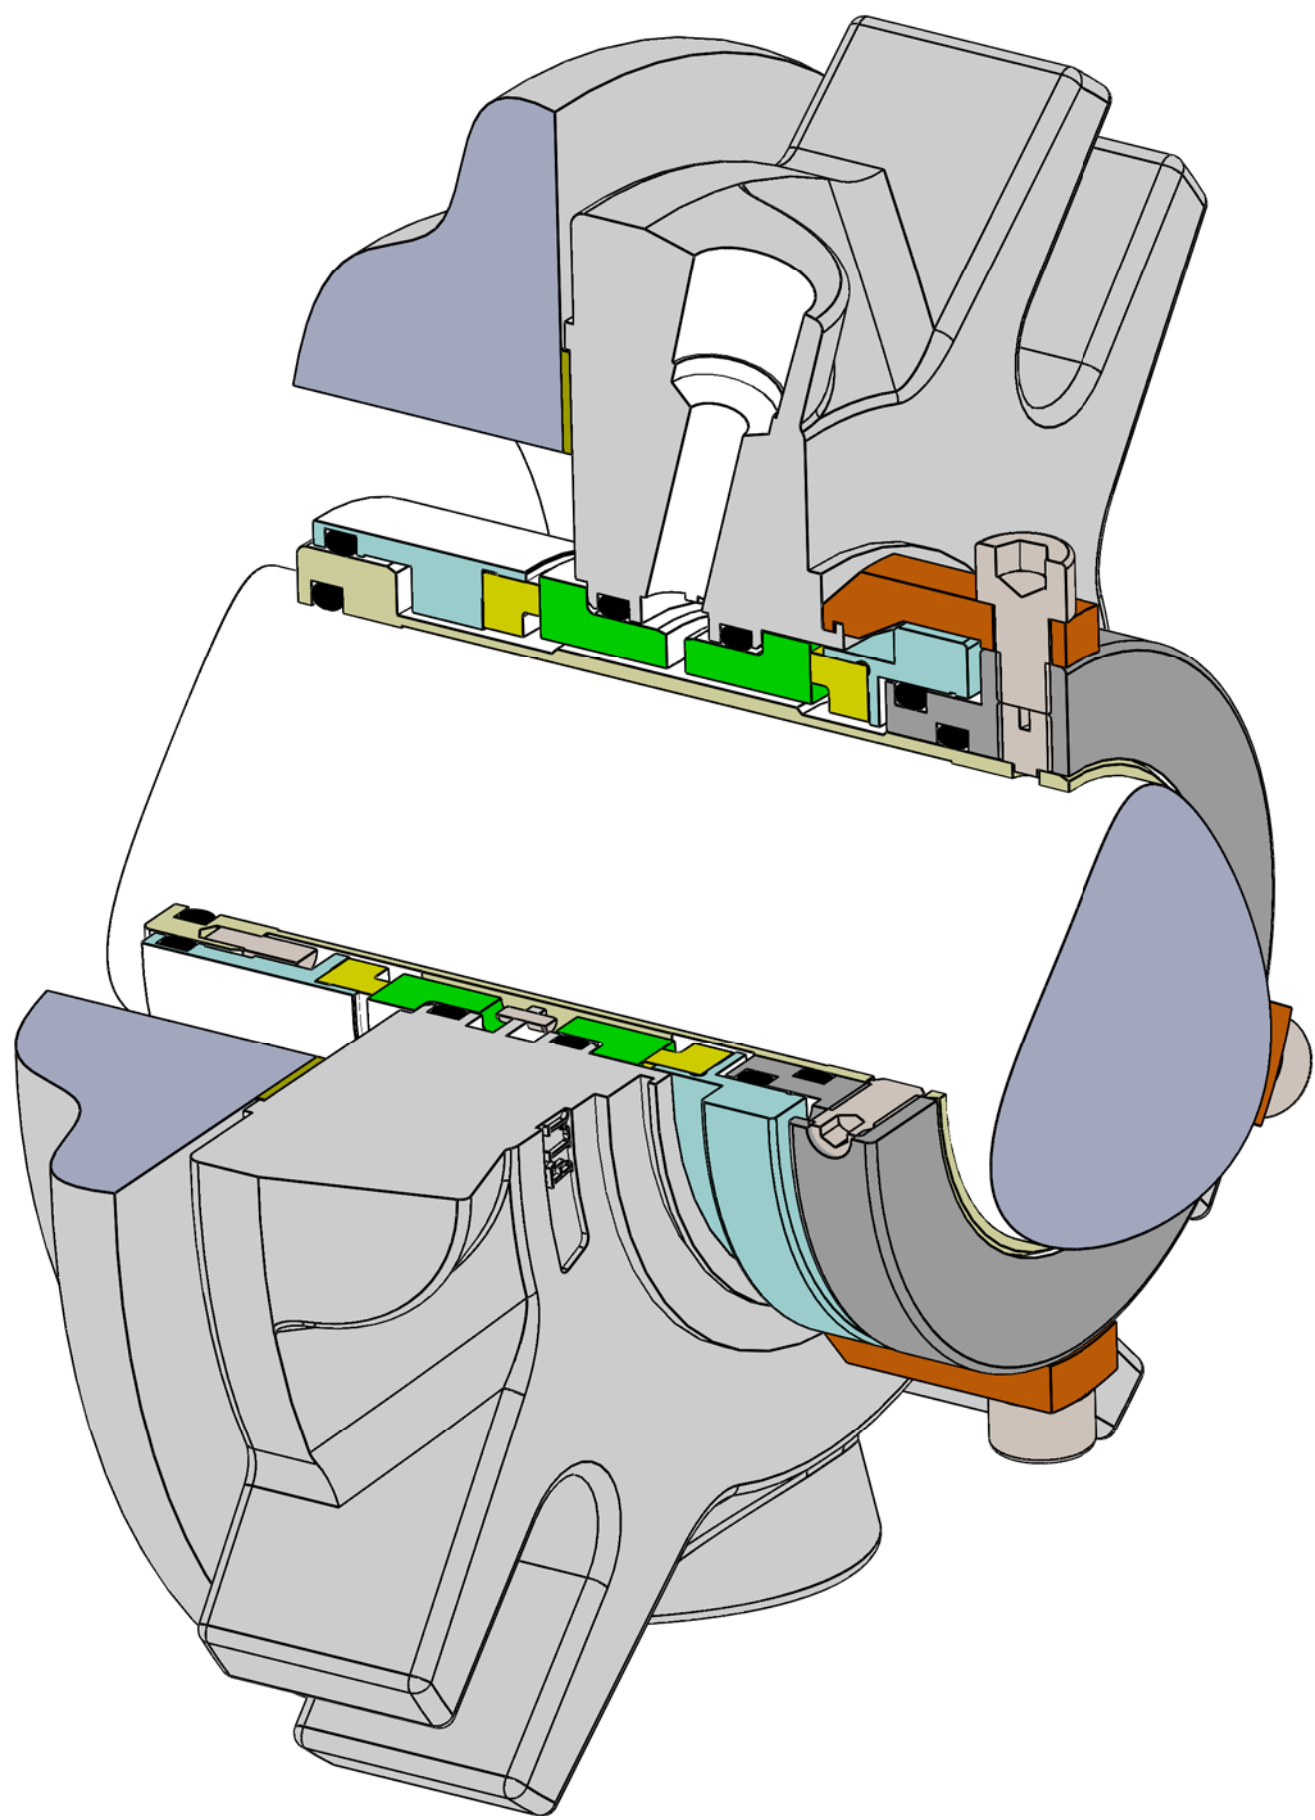

EDM ANSI-尺寸信息（mm）									
A	B	C	D	Dn	Dm	E	F	G	H
34.925	135.3	86.7	48.97	73	86	31.8	50.229	22.59	14.3
44.45	171.45	112.1	62.18	89	110	30.05	55.54	27.11	14.3
47.625	171.45	112.1	65.35	91	105	30.32	55.12	27.16	14.3
53.975	193	118.5	71.7	98.5	116.5	36.81	50.91	23	17.5
63.5	210	137.5	84.13	121	138	36.58	56.69	29.06	17.5
66.675	210	137.5	87.3	117	130	36.16	57.1	29.47	17.5

EDM ANSI-尺寸信息（Inches）									
A	B	C	D	Dn	Dm	E	F	G	H
1.375	5.327	3.413	1.928	2.874	3.386	1.252	1.978	0.889	0.563
1.750	6.750	4.413	2.448	3.504	4.331	1.183	2.187	1.067	0.563
1.875	6.750	4.413	2.573	3.583	4.134	1.194	2.170	1.069	0.563
2.125	7.598	4.665	2.823	3.878	4.587	1.449	2.004	0.906	0.689
2.500	8.268	5.413	3.312	4.764	5.433	1.440	2.232	1.144	0.689
2.625	8.268	5.413	3.437	4.606	5.118	1.424	2.248	1.160	0.689

未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions 公差 Tolerances		[mm]	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	
Format/图幅 DIN EN ISO 216		A3		第一视角 Projection Method 1			表面粗糙度表示方法符合 Method of indicating surface to		ISO1302(μm)公差符合 Tolerances according to		
标记 NO.	处数 QTY	描述 Description		日期 Date	姓名 Name		 昆山福步工业设备有限公司 FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO., LTD.				
											
											
											
											
					设计 Design	日期 Date	姓名 Name	规格型号/TYPE NO. EDM ANSI			
					校核 Checked	2021/9/7	赵丹丹				
					审核 Approved						
					公差带 Tolerance	比例 Scale	材料标记 Matrial Code	图号/Drawing NO. 机械密封			
					ISO 8015	1:1					
								质量/Weight 5820.17g		版本: Rev. A	