


This drawing is the property of FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO.,LTD.unauthorized disclosure to any third party or duplication is not permitted.


接口说明 Connection	
F	冲洗液接口

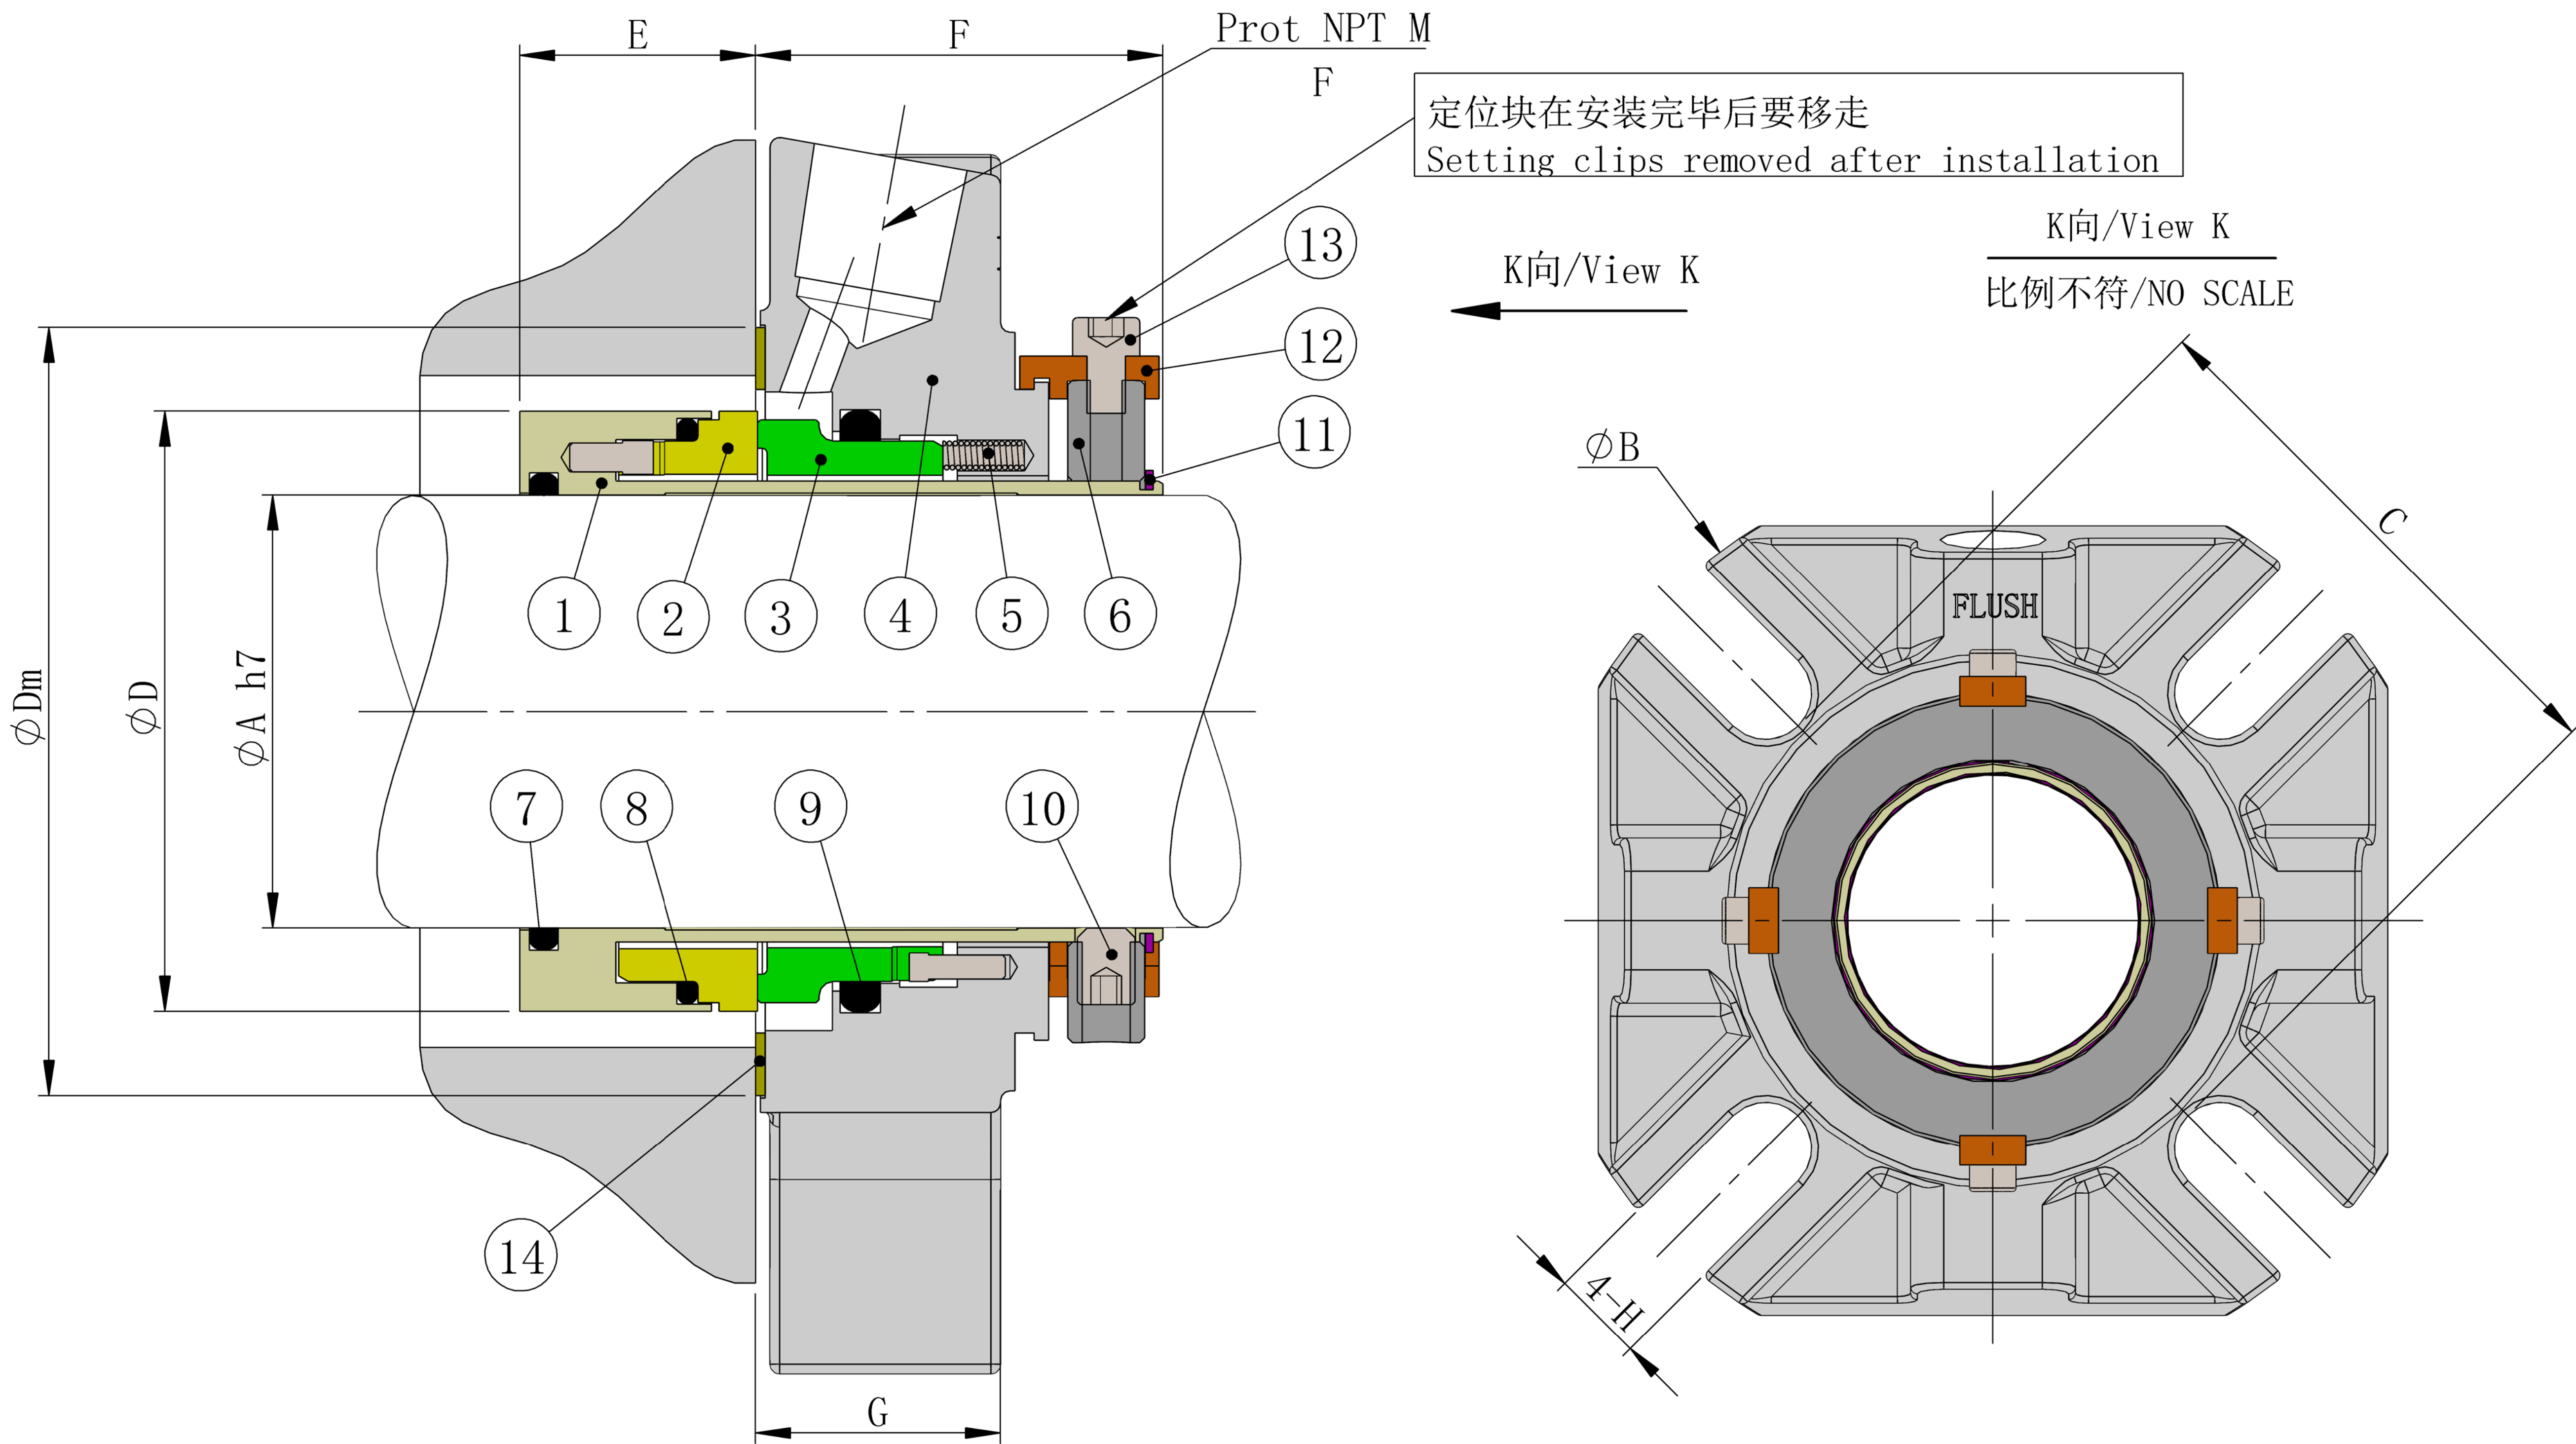

序号 No	零件名称 Description	材料 Material
1	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
2	动环/Rotary Face	SSIC/TC
3	静环/Stationary Face	Carbon/SSIC/TC
4	压盖/Gland	316SS不锈钢/Stainless Steel
5	弹簧/Spring	Alloy 276
6	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
7	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
8	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
9	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
10	驱动螺钉/Drive Screw	316SS不锈钢/Stainless Steel
11	卡簧/Circlip	316SS不锈钢/Stainless Steel
12	定位块/Setting Clip	铜/Brass
13	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel
14	垫片/Gasket	非石棉/AF1

KSC-尺寸信息 (mm)									
A	B	C	D	Dm	E	F	G	H	M
25	105.0	62.0	43.0	60.0	25.1	41.9	25.5	13.2	1/4"
28	105.0	62.0	46.0	60.0	25.1	41.9	25.5	14.0	1/4"
30	105.0	66.7	48.0	63.0	25.1	41.9	25.5	14.0	1/4"
32	110.0	68.5	50.0	65.0	25.1	41.9	25.5	14.0	1/4"
33	110.0	68.5	50.0	65.0	25.1	41.9	25.5	14.0	1/4"
35	113.0	72.0	53.0	68.0	25.1	41.9	25.5	14.0	1/4"
38	135.0	80.0	56.0	73.0	25.1	41.9	25.5	14.0	3/8"
40	135.0	80.0	58.0	73.0	25.1	41.9	25.5	14.0	3/8"
42	135.0	80.0	60.5	75.5	25.1	41.9	25.5	14.0	3/8"
43	135.0	80.0	60.5	75.5	25.1	41.9	25.5	14.0	3/8"
45	138.0	83.5	62.5	80.0	25.1	41.9	25.5	14.0	3/8"
48	138.0	83.5	65.5	82.0	25.1	41.9	25.5	14.0	3/8"
50	150.0	87.0	68.0	85.0	25.1	41.9	25.5	14.0	3/8"
53	150.0	97.0	72.0	93.0	25.1	41.9	25.5	18.0	3/8"
55	150.0	97.0	73.0	88.0	25.1	41.9	25.5	18.0	3/8"
60	157.0	102.0	78.0	98.5	25.1	41.9	25.5	18.0	3/8"
65	165.0	109.0	83.1	107.0	25.1	41.9	25.5	18.0	3/8"
70	178.0	118.5	93.0	116.0	25.1	41.9	25.5	18.0	3/8"
75	190.0	129.0	100.0	125.0	34.1	49.9	28.1	18.0	3/8"
80	195.0	135.0	106.4	131.0	34.1	49.9	28.1	18.0	3/8"
85	198.0	139.0	109.5	135.0	34.1	49.9	28.1	22.0	3/8"
90	205.0	145.0	115.9	142.0	34.1	49.9	28.1	22.0	3/8"
95	208.0	148.0	119.1	147.0	26.6	57.4	28.1	22.0	3/8"
100	218.0	154.0	125.4	151.0	26.6	57.4	28.1	22.0	3/8"

KSC-尺寸信息 (Inches)									
A	B	C	D	Dm	E	F	G	H	M
1.000	4.134	2.441	1.693	2.362	0.988	1.650	1.004	0.520	1/4"
1.125	4.134	2.441	1.811	2.362	0.988	1.650	1.004	0.520	1/4"
1.250	4.331	2.697	1.969	2.559	0.988	1.650	1.004	0.520	1/4"
1.375	4.449	2.835	2.087	2.677	0.988	1.650	1.004	0.520	1/4"
1.500	5.315	3.150	2.205	2.874	0.988	1.650	1.004	0.520	3/8"
1.625	5.315	3.150	2.382	2.972	0.988	1.650	1.004	0.520	3/8"
1.750	5.433	3.287	2.461	3.150	0.988	1.650	1.004	0.520	3/8"
1.875	5.433	3.287	2.579	3.228	0.988	1.650	1.004	0.520	3/8"
2.000	5.906	3.819	2.835	3.661	0.988	1.650	1.004	0.709	3/8"
2.125	5.906	3.819	2.835	3.661	0.988	1.650	1.004	0.709	3/8"
2.250	6.181	4.016	3.071	3.878	0.988	1.650	1.004	0.709	3/8"
2.375	6.181	4.016	3.071	3.878	0.988	1.650	1.004	0.709	3/8"
2.500	6.496	4.291	3.272	4.213	0.988	1.650	1.004	0.709	3/8"
2.625	7.008	4.665	3.661	4.567	0.988	1.650	1.004	0.709	3/8"
2.750	7.008	4.665	3.661	4.567	0.988	1.650	1.004	0.709	3/8"
2.875	7.480	5.079	3.937	4.921	1.343	1.965	1.106	0.709	3/8"
3.000	7.677	5.315	4.189	5.157	1.343	1.965	1.106	0.709	3/8"
3.125	7.677	5.315	4.189	5.157	1.343	1.965	1.106	0.709	3/8"
3.250	7.795	5.472	4.311	5.315	1.343	1.965	1.106	0.866	3/8"
3.375	7.795	5.472	4.311	5.315	1.343	1.965	1.106	0.866	3/8"
3.500	8.071	5.709	4.563	5.591	1.343	1.965	1.106	0.866	3/8"
3.625	8.189	5.827	4.689	5.787	1.047	2.260	1.106	0.866	3/8"
3.750	8.189	5.827	4.689	5.787	1.047	2.260	1.106	0.866	3/8"
4.000	8.583	6.063	4.937	5.945	1.047	2.260	1.106	0.866	3/8"

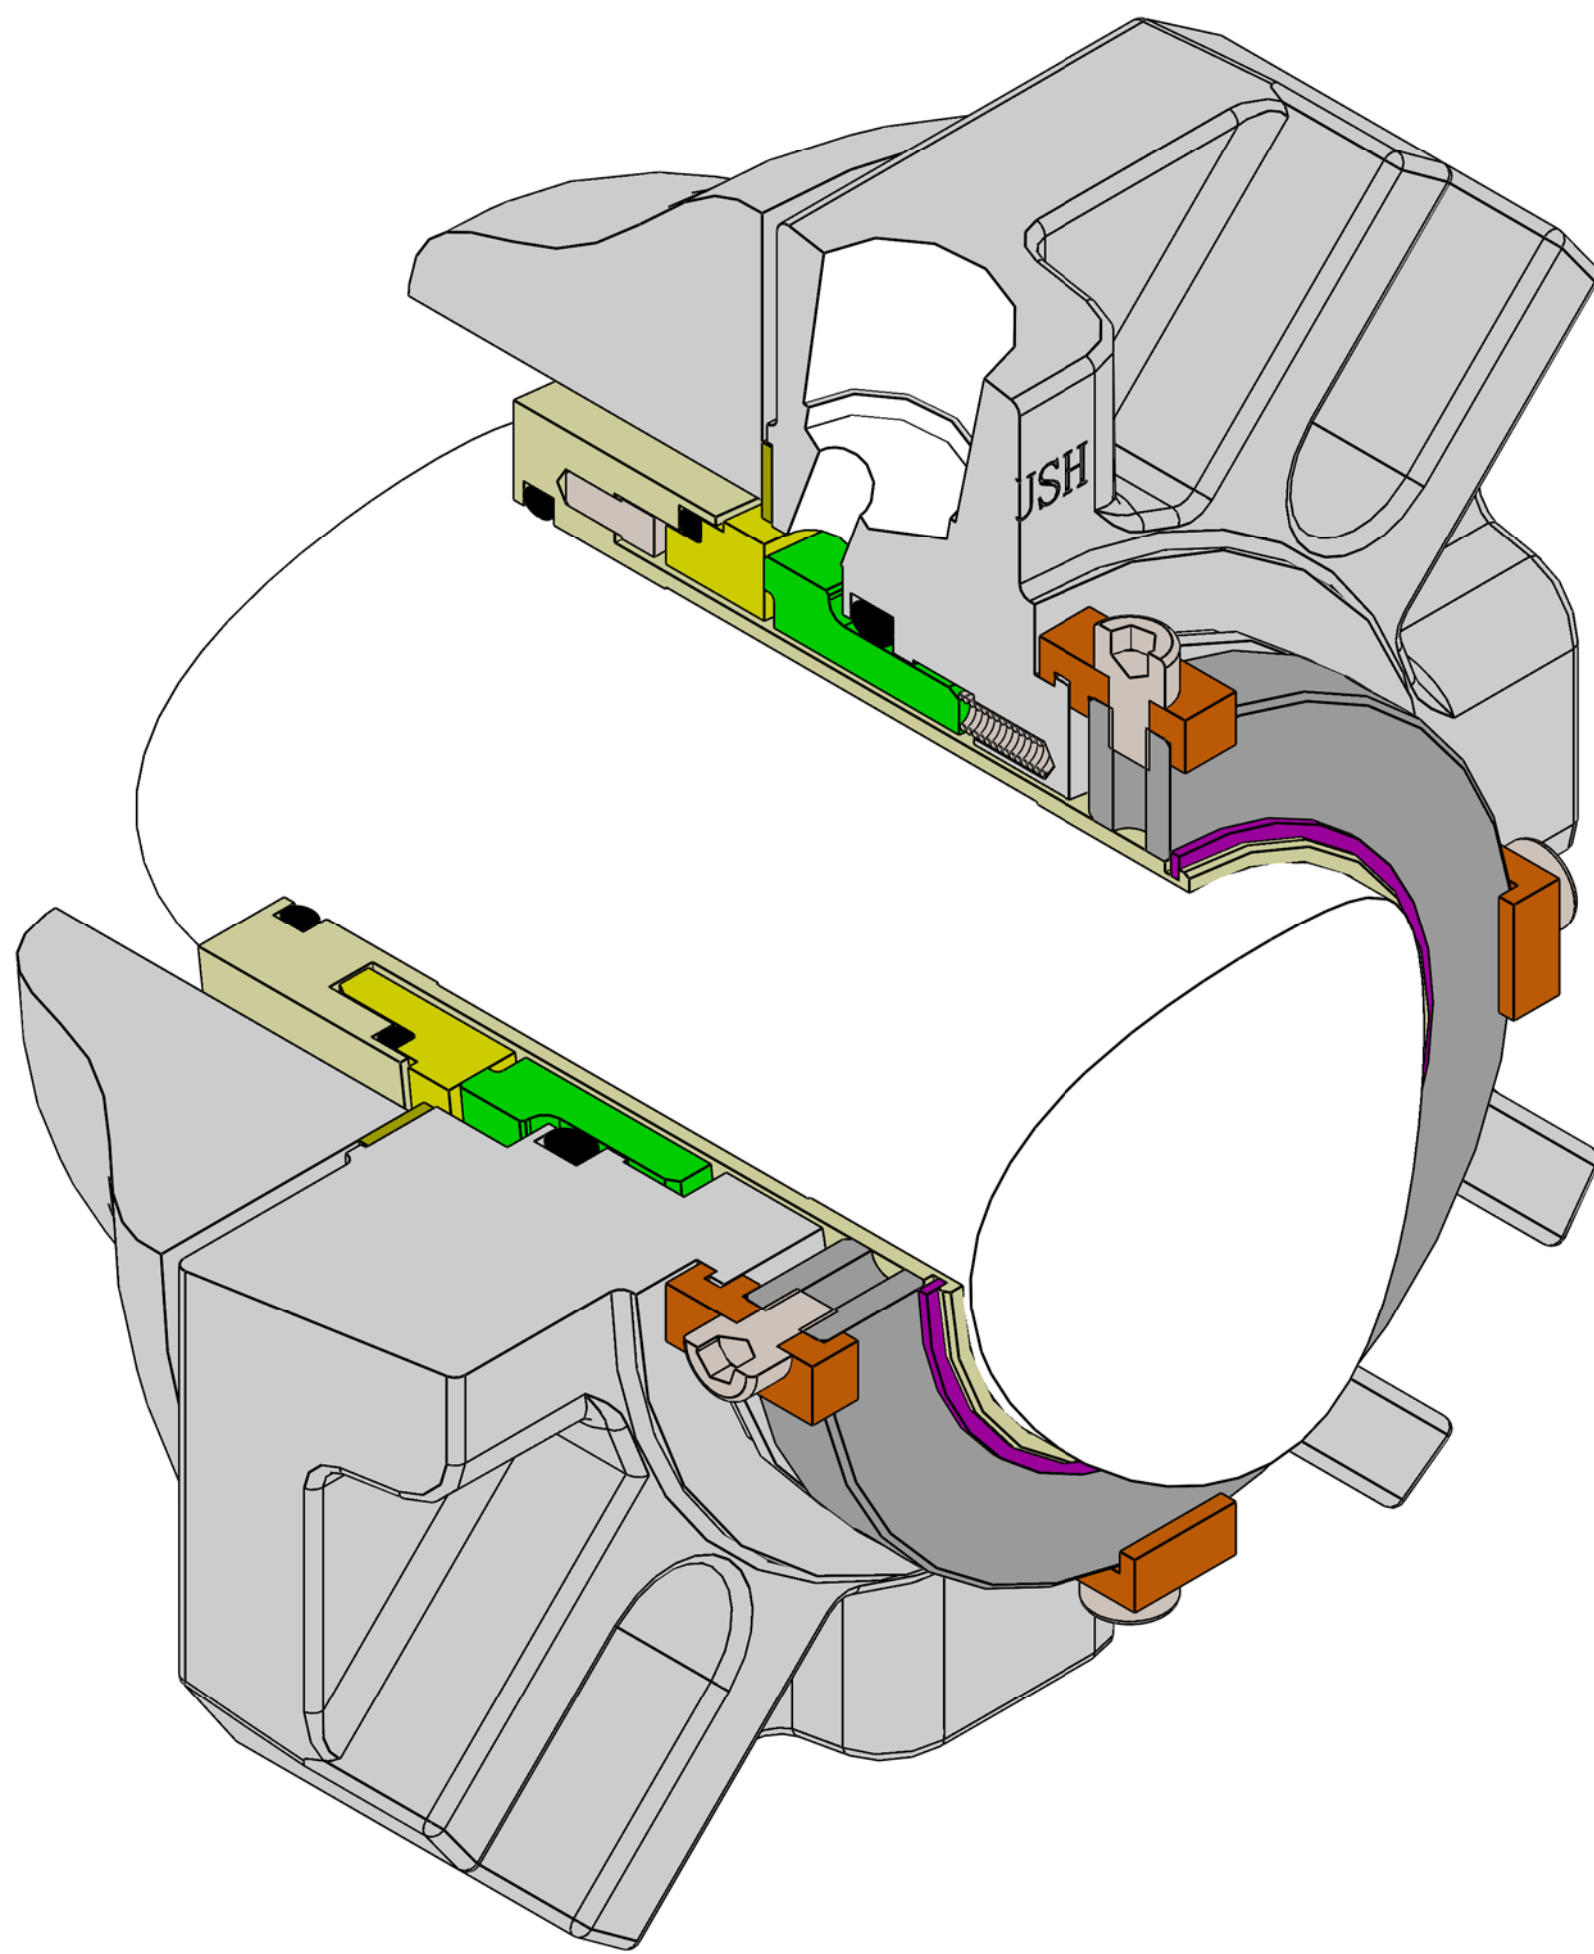

未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions 公差 Tolerances		[mm] O.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000
Form/图稿 DIN EN ISO 216		A3	第一视角 Projection Method 1		 表面粗糙度表示方法符合 Method of indicating surface to		ISO1302 (μm)	公差符合 Tolerances according to ISO 2768-m	
标记 NO.	数量 QTY	描述 Description	日期 Date	姓名 Name	昆山福步工业设备有限公司 FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO., LTD.				
					规格型号/TYPE NO.				
									
					KSC 机械密封				
									
					设计 Design	日期 Date	姓名 Name	质量/Weight 2465.15 g	
						2021/8/14	赵丹丹		
					审核 Checked				
					审核 Approved				
					公差带 Tolerance	比例 Scale	材料标记 Material Code	图号/Drawing NO.	
					ISO 8015	1:1		版本: Rev. A	